


REVISIONS
5-29-69
6-13-69

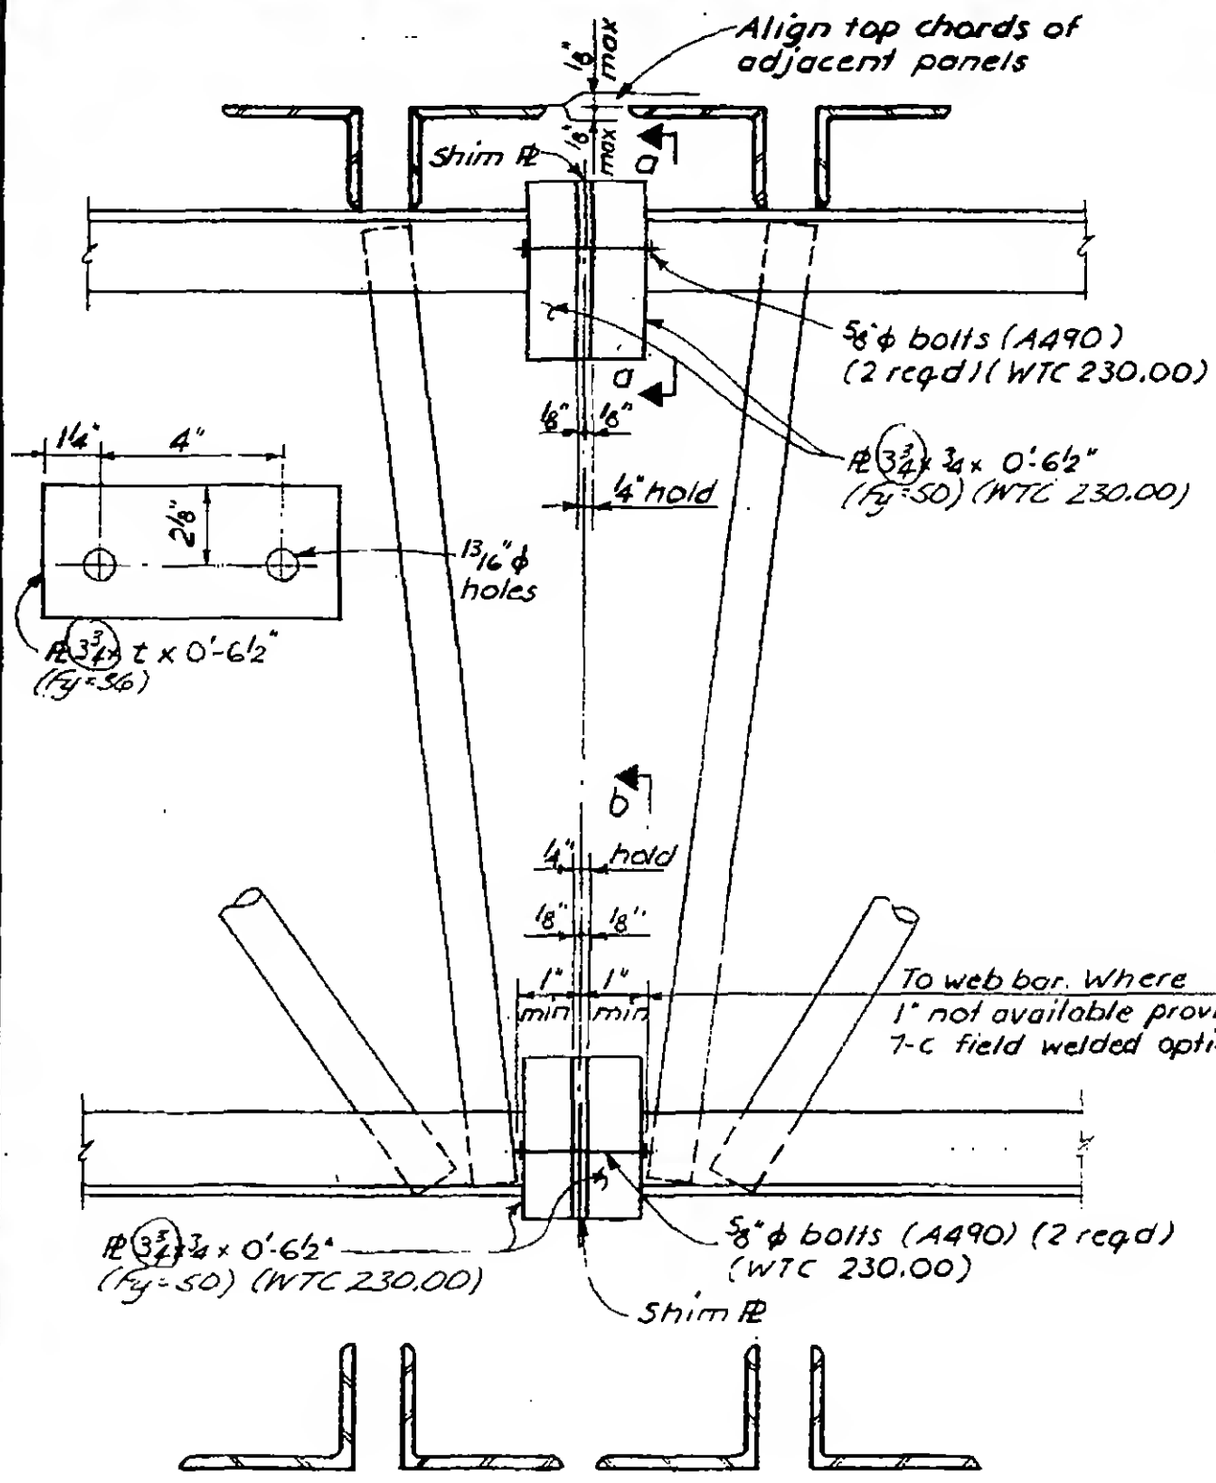

Conn Detail 7-c

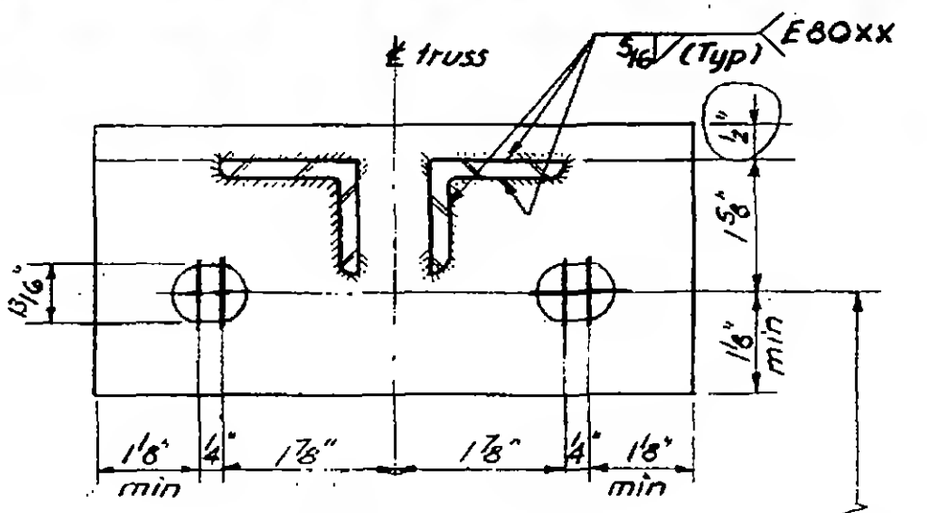

Section a-a

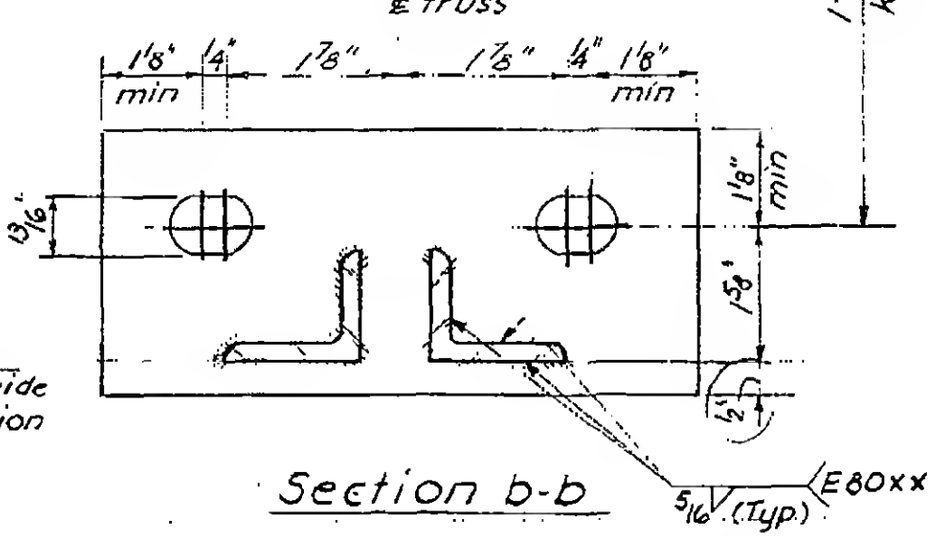

Section b-b

Notes:

1. Provide hardened washers under both bolt head and nut.
2. Provide shim stock in both 3/16" and 1/8" nominal sizes.

LICENSED PROFESSIONAL ENGINEER — LESLIE E. ROBERTSON — No. 34360 — UNIVERSITY OF THE STATE OF NEW YORK

DESIGNED H Roet
DRAWN J. Smith
REVIEWED W. Brewer