

LIGHTING FIXTURES SCHEDULE

TYPE	DESCRIPTION	MANUFACTURER	ALCPT. MFGR.	LAMPS	REMARKS
'A'	FLUORESCENT SURFACE WALL MOUNTED EXIT SIGN. SIGN SHALL HAVE AN INTEGRALLY MOUNTED SELF-CONTAINED EMERGENCY BATTERY PACK SUITABLE FOR 277 V OPERATION.	MC PHILBEN E90W-BF277V		(2)FBTS	*PROVIDE DIRECTIONAL ARROWS AS SHOWN ON THE DWG'S.
'B'	SAME AS ABOVE, EXCEPT CEILING MOUNTED.	MC PHILBEN E40C-BF277V		(2)FBTS	SAME AS ABOVE.

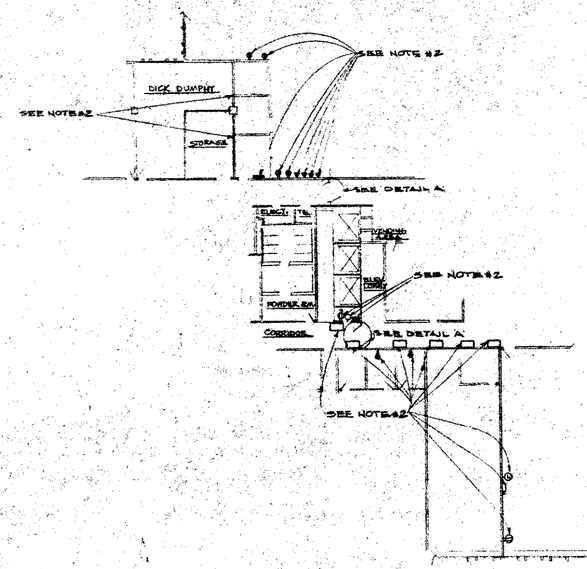

PART PLAN OF 7TH FLOOR LIGHTING & POWER - AREA 'F'
SCALE 1/16"=1'0"

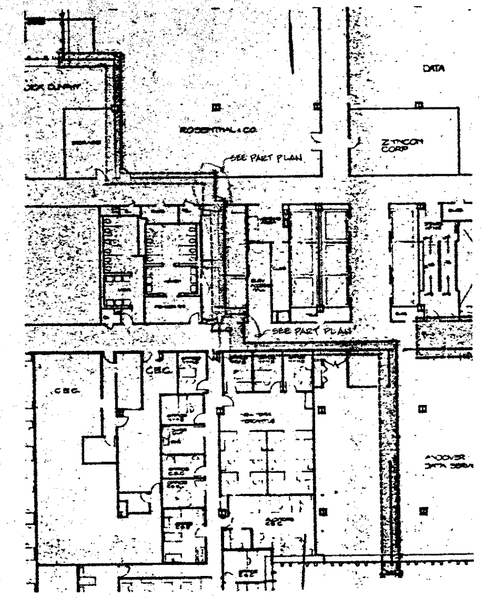


comit

SYMBOL LIST:

- 2'X4' FLUORESCENT LIGHTING FIXTURE
- 1'X4' FLUORESCENT LIGHTING FIXTURE
- COVE LIGHT
- INCANDESCENT LIGHTING FIXTURE
- EMERGENCY LIGHTING FIXTURE
- S (10) — SINGLE POLE SWITCH. NUMBER DENOTES NO. OF SWITCHES.
- EXIT LIGHT - CEILING MOUNTED. DIRECTIONAL ARROW AS SHOWN.
- EXIT LIGHT - WALL MOUNTED
- SPEAKER - CEILING MOUNTED
- SPEAKER - WALL MOUNTED
- FIRE ALARM STATION
- SD — SMOKE DETECTOR
- WF — WATERFLOW SWITCH
- T — TAMPER SWITCH
- CR — CARD KEY
- DC — DOOR CONTACT
- ES — ELECTRIC STRIKE
- TI — TERMINAL INTERFACE (IN CEILING)
- K — DOOR RELEASE BUTTON (CARD KEY)
- PUSH BUTTON (CHIME)
- WALL MOUNTED DUPLEX RECEPTACLE
- FLOOR MOUNTED DUPLEX RECEPTACLE
- WALL MOUNTED TELEPHONE OUTLET
- SP — STAND PIPE TELEPHONE
- FLOOR MOUNTED TELEPHONE OUTLET
- WALL MOUNTED SIGNAL OUTLET
- CLOCK OUTLET
- PLUGMOLD
- EXISTING UNDERFLOOR DUCT SYSTEM
- E — EXISTING TO REMAIN
- R — REMOVE
- RR — REMOVE AND RELOCATE
- ER — EXISTING RELOCATED
- N — NEW
- I — INTERCOM
- CONDUIT UP
- CONDUIT DOWN
- J — CEILING MOUNTED JUNCTION BOX
- JH — WALL MOUNTED JUNCTION BOX
- WIRING & CONDUIT
- MH — MAGNETIC DOOR HOLDER
- POWER OR LIGHTING PANEL

LIGHTING FIXTURES NOTES:

1. FLUORESCENT LIGHTING FIXTURES INDICATED NEW SHALL BE PORT AUTHORITY BUILDING STANDARD. ELECTRICAL CONTRACTOR SHALL PURCHASE LIGHTING FIXTURES FROM THE PORT AUTHORITY AND INSTALL THEM.

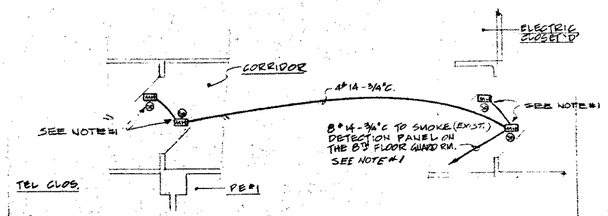

PART PLANS OF 7TH FLOOR (DETAIL 'A')
SCALE: 1/4"=1'-0"

NOTES:
1. COMBINATION SMOKE DETECTION & DOOR HOLDER FURNISHED BY OTHERS. WIRE & INSTALLED BY ELECTRICAL CONTRACTOR. (RAMSON - FIRE-MARK)
2. LIGHTING FIXTURE, SWITCHES TELEPHONE & POWER OUTLET LIGHTING OR POWER PANELS AND OTHER ELECTRICAL DEVICES ALONG THE NEW 2 HR. FIRE RATED WALLS SHALL BE BROUGHT OUT TO THE NEW WALL SURFACE.

date	REVISIONS	#
2-21-84	SUBMITTED TO P.A. FOR REVIEW.	
4/5/84	SUBMITTED TO P.A. FOR REVIEW & GENERAL REVISIONS	1
11/5/84	SUBMITTED TO P.A. FOR REVIEW.	

CEC
COMMODITIES EXCHANGE CENTER
FOUR WORLD TRADE CENTER
NEW YORK, NEW YORK 10048

EGRESS UPGRADE
PHASE 1 & 2

7TH FLOOR SYMBOLS AND LIGHTING FIXTURE SCHEDULE

project 1930
scale NONE
date 2-21-84

MS&J MEYER STRONG & JONES, PC
MECHANICAL & ELECTRICAL ENGINEERS
NEW YORK, N.Y. 10 69

SONSONORE BRIGNATI & MAZZOTTA, P.C. ARCHITECTS
370 SEVENTH AVENUE NEW YORK, NEW YORK 10001 (212) 868 9400