
SKILLING - HELLE - CHRISTIANSEN - ROBERTSON Structural & Civil Engineers

PROJECT THE WORLD TRADE CENTER | TITLE TYPICAL BEAM FIREPROOFING DETAILS | DATE 3-1-68

REVISIONS

8-20-68

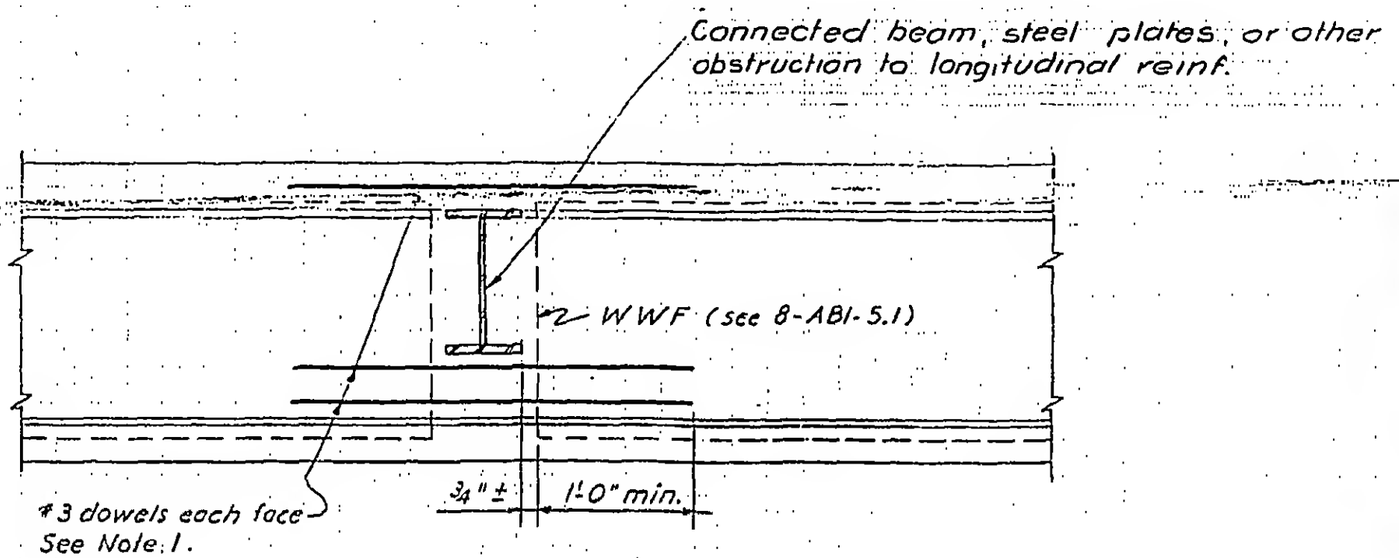

Notes:

1) Provide at least 1-#3 dowel for each 5" of WWF cut. Place half of the number of dowels uniformly at each side of the obstruction. Optionally, WWF (equal in sectional area to the amount of WWF cut) may be used in lieu of #3 dowels.

LICENSED PROFESSIONAL ENGINEER LESLIE E. ROBERTSON No. 34360 UNIVERSITY OF THE STATE OF NEW YORK

DETAIL WHERE WWF IS INTERRUPTED

DETAIL B

8-ABI-5.2