
B.O.H. REFURBISHMENT NOTES

NOT USED	(1)	PATCH DENTS & PAINT EXISTING WALL
NOT USED	(2)	PATCH HOLES, SPACKLE & PAINT EXISTING WALL
NOT USED	(3)	REFRAME & RECLAD GYP. WALL, SPACKLE & PAINT.
NOT USED	(4)	REPLACE 4X8 FIBERGLASS PANEL & TRIM. (3-PANELS OR LESS PER SPACE)
NOT USED	(4a)	PROVIDE NEW FIBERGLASS PANEL COVERING OVER ENTIRE WALL SURFACE
NOT USED	(5)	REGLUE & CLEAN EXISTING TORN OR PEELING WALL PAPER
NOT USED	(7)	PROVIDE NEW BASE RAILS
NOT USED	(8)	PROVIDE NEW WALL GUARDS TO MATCH EXISTING
NOT USED	(9)	PROVIDE NEW CORNER GUARDS TO MATCH EXISTING
NOT USED	(10)	REPLACE BROKEN OR MISSING A.C.T. - VERIFY SIZE & TYPE IN FIELD. (10 TILES OR LESS PER SPACE). PAINT CEILING THROUGHOUT SPACE.
	(11)	PROVIDE NEW A.C.T. CEILING, FRAMING, SUPPORTS & GRID
NOT USED	(12)	REPLACE BENT, BROKEN OR MISSING PERFORATED METAL CEILING TILES TO MATCH EXISTING. (TEN OR LESS PER SPACE)
NOT USED	(12a)	PROVIDE NEW PERFORATED METAL TILE CEILING THROUGHOUT SPACE.
NOT USED	(13)	REPLACE BROKEN OR MISSING V.C.T. WITH NEW TO MATCH EXISTING. (10 OR LESS PER SPACE)
	(14)	PROVIDE NEW V.C.T. FLOOR THROUGHOUT SPACE.
	(15)	REPLACE BROKEN OR MISSING CERAMIC TILE WITH NEW TO MATCH EXISTING. (TEN OR LESS PER SPACE)
NOT USED	(16)	PROVIDE NEW CERAMIC TILE THROUGHOUT SPACE
NOT USED	(17)	PROVIDE NEW CARPET THROUGHOUT SPACE.
NOT USED	(18)	REPAINT EXISTING DOOR & FRAME TO MATCH EXISTING
NOT USED	(19)	REPAIR OR REPLACE EXISTING DOOR & HARDWARE.
NOT USED	(20)	EXISTING DOORS HAVE BEEN REMOVED FROM FRAME & STORED ON SITE. DOORS ARE TO BE RE-HUNG & REFURBISHED AS REQUIRED. DOORS MAY REQUIRE NEW HINGES.
NOT USED	(21)	DOOR FRAME TO BE REPLACED WITH SIMILAR FRAME. REHANG DOORS. (SEE NOTE 20)
	(21a)	DOOR FRAME TO BE REPLACED WITH SIMILAR FRAME.
NOT USED	(22)	REPAIR OR REPLACE CLOSET DOOR, REHANG ON TRACK & SERVICE HARDWARE.
NOT USED	(23)	IN-FILL GWB PARTITION TO MATCH EXISTING WHERE DOOR & FRAME HAS BEEN DEMOLISHED. VERIFY PARTITION TYPE IN FIELD.
NOT USED	(24)	PATCH, REPAIR & RE-FINISH EXISTING WALL TO MATCH EXISTING WHERE ADJACENT WALL HAS BEEN REMOVED.
NOT USED	(25)	PROVIDE NEW VINYL WALL BASE TO MATCH EXISTING.
NOT USED	(26)	ADD SALVAGED CHAIR RAIL TO NEW PARTITION - ALIGN WITH EXISTING.
NOT USED	(27)	PROVIDE LIGHTWEIGHT CONCRETE OVER EXISTING RAMP TO MATCH ELEVATION OF REMAINDER OF ROOM.
NOT USED	(28)	PROVIDE RAMP OF LIGHTWEIGHT POURED CONCRETE, TO BE SMOOTH, LEVEL & TO HAVE A MAXIMUM SLOPE OF 1:12.
NOT USED	(29)	FLASH PATCH OVER EXISTING SLAB WITH LIGHTWEIGHT CONCRETE.
NOT USED	(30)	CLEAN & PAINT EXISTING CONCRETE SLAB.
NOT USED	(31)	REPAINT MULLIONS TO MATCH EXISTING, CLEAN GLASS ON BOTH SIDES.

Finish Schedule

ACT	New Acoustic Tile throughout space (Ref. refurbishment note 10)
E/ACT	Existing Acoustic Tile Ceiling to be repaired
AP	Acoustical Panels
Bs	Balustrade
BE	Beads
CG	New Corner Guards
CGLS	Cast Glass
CONC	Concrete (Sealed)
CPT	Carpet Throughout
CT	Ceramic Tile
CTB	Ceramic Tile Base
CW	Existing Curtainwall
EP	Epoxy Paint (nonslip) flash patch & level as required
(E)	Existing: Patch & Repair as required
E/FG	Existing Fiberglass wall panel to be cleaned/secured
E/QT	Existing Quarry Tile Floor to be repaired and painted (Ref. refurbishment note 15)
E/GWB	Existing GWB Partion to be repaired and painted (Ref. refurbishment note 1,2 and 3)
E/PMC	Existing Perforated metal panel to be repaired (Ref. refurbishment note 12)
E/WP	Existing Wallpaper to be repaired (Ref. refurbishment note 5)
FG	New 4'-8' Fiberglass panel replacement (Ref. refurbishment note 4)
FP	Fabric Wrap Panels on Gypsum Wall Board
GL	Glazing
GT	Glass Tile
GWB	New Gypsum Wall Board Partition
ICW	Interior Curtainwall
M	Marble
MR	Mirror/Glass
MT	Marble Tile
MTL	Metal
MP	Mineral Plaster
N	New
OW	Operable Wall
P	Paint
PL	Plaster
PC	Precast Concrete
PM	Press Metal
Q	Quarry Tile
RW	Ribbed Wood
S	Scarfito
SAP	Suspended Acoustic Panel
SCS	Suspended Ceiling System
SWC	Suspended Wood Ceilings
Sh	Shades
SS	Stainless Steel
ST	Stone
STEN	Stencils
T	Terrazzo
V	Vinyl Base
VCT	New Vinyl Composition Tile to match existing
WC	Wall Covering
WD	Wood
WG	New Wall Guards
WP	New Wall Paper on GWB partition
WWC	Wood Wallcovering
X	Xorel on Gypsum Wall Board

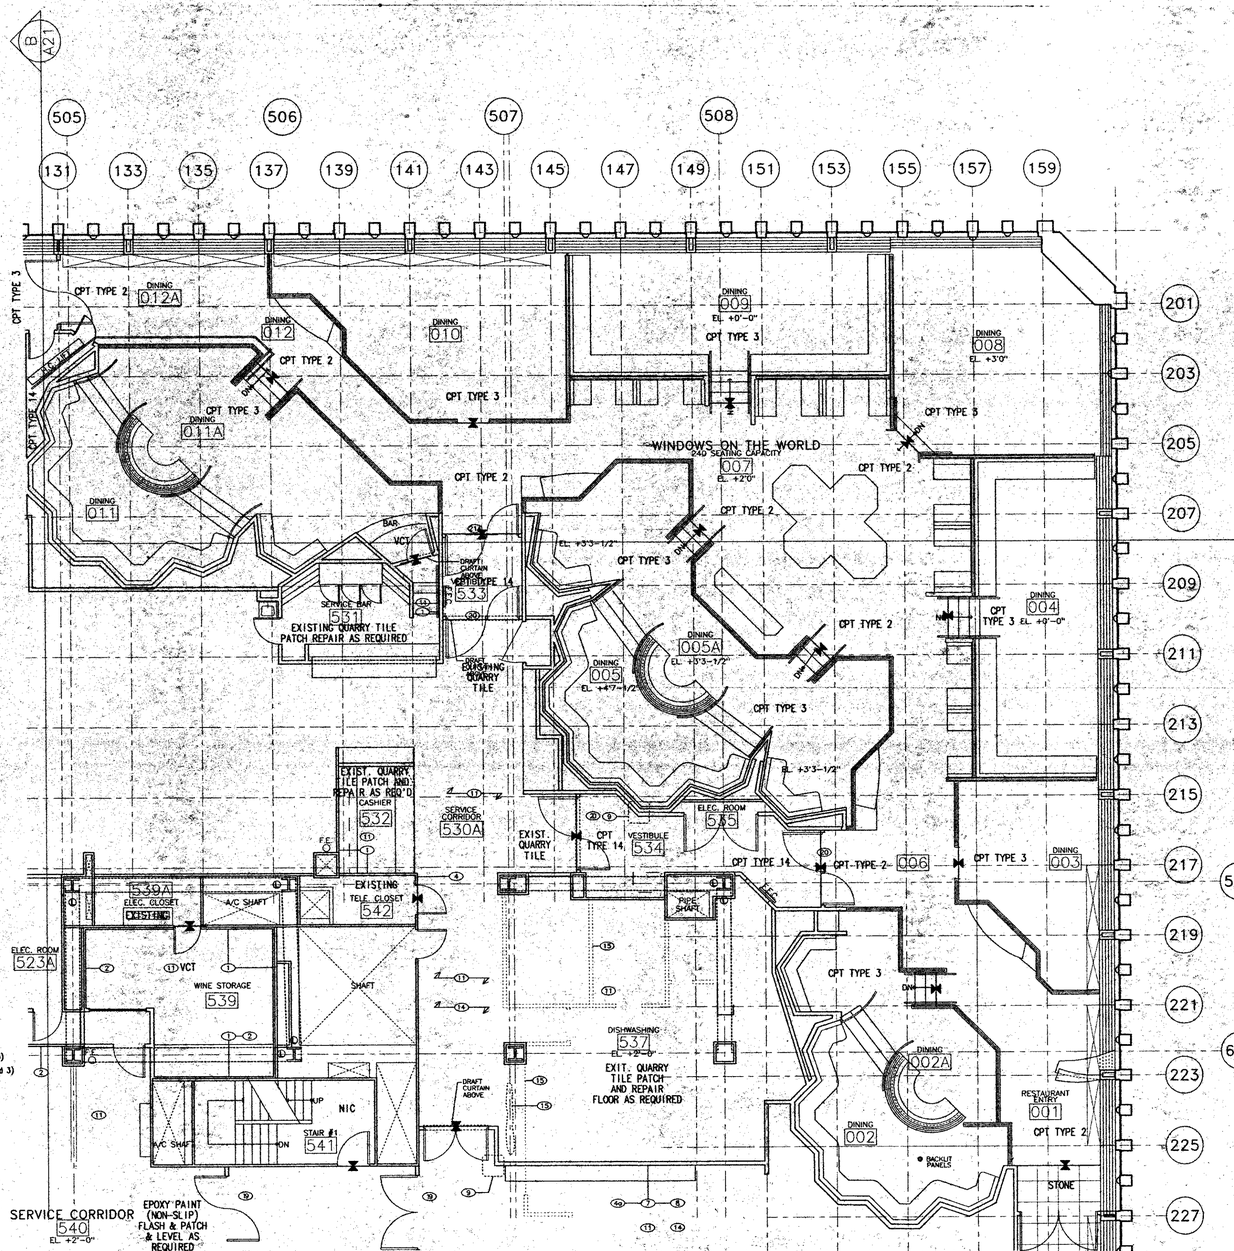

QUAD "B"
SEE SHEET 1110

CARPET PATTERNS

CPT 1 ● PROMENADES 106/107 – "World Cities" Wilton weave, 9 row, 5 frame, 80% wool/20% nylon, 64.7 oz face wt. 6'-0" repeat, color A

CPT 2 ● Windows (Center) – "Waves" Wilton weave, 9 row, 5 frame, 80% wool/20% nylon, 64.7 oz face wt. 4'-0" repeat, color A

CPT 3 ● Windows (Pods & Windows) – "Waves" Wilton weave, 9 row, 5 frame, 80% wool/20% nylon, 64.7 oz face wt. 4'-0" repeat, color B

CPT 4 ● Bar – "Words" Wilton weave, 9 row, 5 frame, 80% wool/20% nylon, 64.7 oz face wt. 3'-0" repeat, color A

CPT 5 ● Arrival 106 – "Lower Manhattan at night" Hand made custom 100% wool carpet by Patterson, Flynn, Martin and Manges

CPT 6 ● Liberty Suites & Prefunction – "Lower Manhattan night/day" Wilton weave, 9 row, 5 frame, 80% wool/20% nylon, 64.7 oz face wt.

CPT 7 ● Hildson Suites & Prefunction – "Window Mullions" Wilton Weave, 9 row, 5 frame, 80% wool/20% nylon, 64.7 oz face wt. 3'-0" repeat, color A

CPT 8 ● Pinnacle Suites – "Roadmap" Wilton weave, 9 row, 5 frame 80% wool/20% nylon, 64.7 oz face wt. 6'-0" repeat, color A

CPT 9 ● Suites A – B "Meteor" Wilton weave, 9 row, 5 frame 80% wool/20% nylon, 64.7 oz face wt. 6'-0" repeat, color A

CPT 10 ● Suites C – F "Meteor" Wilton weave, 9 row, 5 frame 80% wool/20% nylon, 64.7 oz face wt. 6'-0" repeat, color B

CPT 11 ● Hudson/Pinnacle Prefunction & BGH – "color munge" Wilton weave, 9 row, 5 frame, 80% wool/20% nylon, 64.7 oz face wt. 1'-0" repeat, color A

GT 1 ● Brides toilet 108 – Bisazza Mosaico "Le Gemme 25" 20.10(40), and "Le Gemme 25" 20.40(4) by Nemo Tile

GT 2 ● East Promenade toilet 106 – Bisazza Mosaico "Le Gemme 25" 20.87(4),"Le Gemme 25" 20.10(4) and "Le Gemme 25" Costa Smeralda by Nemo Tile

GT 3 ● Womens toilet 408, 409, & 410 – 107 Floor – Bisazza Mosaico "Le Gemme 25" TBD, "Le Gemme 25" TBD, "Le Gemme 25" TBD, "Le Gemme 25" TBD by Nemo Tile

GT 4A ● Womens toilet 408, 409, & 410 – 107 walls – "Interstyle" 4"x4" colors A,B,C, and D TBD by Nemo Tile

GT 4B ● Womens toilet 408, 409, & 410 – 107 walls – "Clear Mirror" 4"x4"

GT 5 ● Mens toilet 107 (Urinal surround) 107 floors/walls – Bisazza Mosaico "Le Gemme 25" 20.86 (4) by Nemo Tile

GT 6 ● Bar 107 – Bisazza Mosaico "Le Gemme 25" Maiorca by Nemo Tile

TER 1 ● Arrivel 107 – Thin set chip size 1-2 (at elevator)

TER 2 ● Arrivel 107 – Mud set chip size 1-3

TER 3 ● Arrivel 107 – Mud set chip size 2-4

TER 4 ● Arrivel 107 – Mud set chip size 3-4

TER 5 ● Bar 107 – Mud set chip size 1-4

TER 6 ● Bar 107 – Mud set chip size 1-4

WINDOWS ON THE WORLD
WORLD TRADE CENTER ONE
NEW YORK CITY, NEW YORK

HARDY HOLZMAN PFEIFFER ASSOCIATES

LANDLORD:
PORT AUTHORITY OF NY & NJ
WORLD TRADE DEPARTMENT
1 WORLD TRADE CENTER, 357TH FLOOR WEST
NEW YORK, NEW YORK 10048

OPERATOR:
B.E. WINDOWS CORPORATION
TBD AVENUE
NEW YORK, NEW YORK 10010

ARCHITECT:
HARDY HOLZMAN PFEIFFER ASSOCIATES
902 BROADWAY, 12TH FLOOR
NEW YORK, NEW YORK 10010

MEP ENGINEER:
ALTIERI, SEBOR WIEBER
37 KNIGHT STREET
NORWALK, CONNECTICUT 06851

STRUCTURAL ENGINEER:
LESLIE E. ROBERTSON ASSOCIATES
11 EAST 26TH STREET
NEW YORK, NEW YORK 10017

KITCHEN PLANNING:
CINI-LITTLE INTERNATIONAL INC.
500 MADISON AVENUE
NEW YORK, NEW YORK 10165

A/V ACOUSTICS:
JAHEN WILSON WILKE
6 EAST 39TH STREET
NEW YORK, NEW YORK 10016

LIGHTING:
CLINE BETTRIDGE BERNSTEIN LIGHTING
31 WEST 52ND STREET
NEW YORK, NEW YORK 10010

CODE/ ADA:
DAVID E. LIEBOWITZ P.C.
70 WEST 40TH STREET
NEW YORK, NEW YORK 10018

TOWER A
TOWER B
NORTH

NO.:	DATE:	REVISIONS:
CONSTRUCTION DOCUMENTATION SUBMISSION		
1	OCTOBER 9, 1995	ISSUE FOR CONSTRUCTION

TITLE: QUADRANT A
107TH FLOOR
FLOORING PLAN

HHPA PROJECT NO.: 5466.03
DATE: JULY 31, 1995
SCALE: 1/A"=1'-0"
DRAWING NO.: 1109

TAA 951114.07