


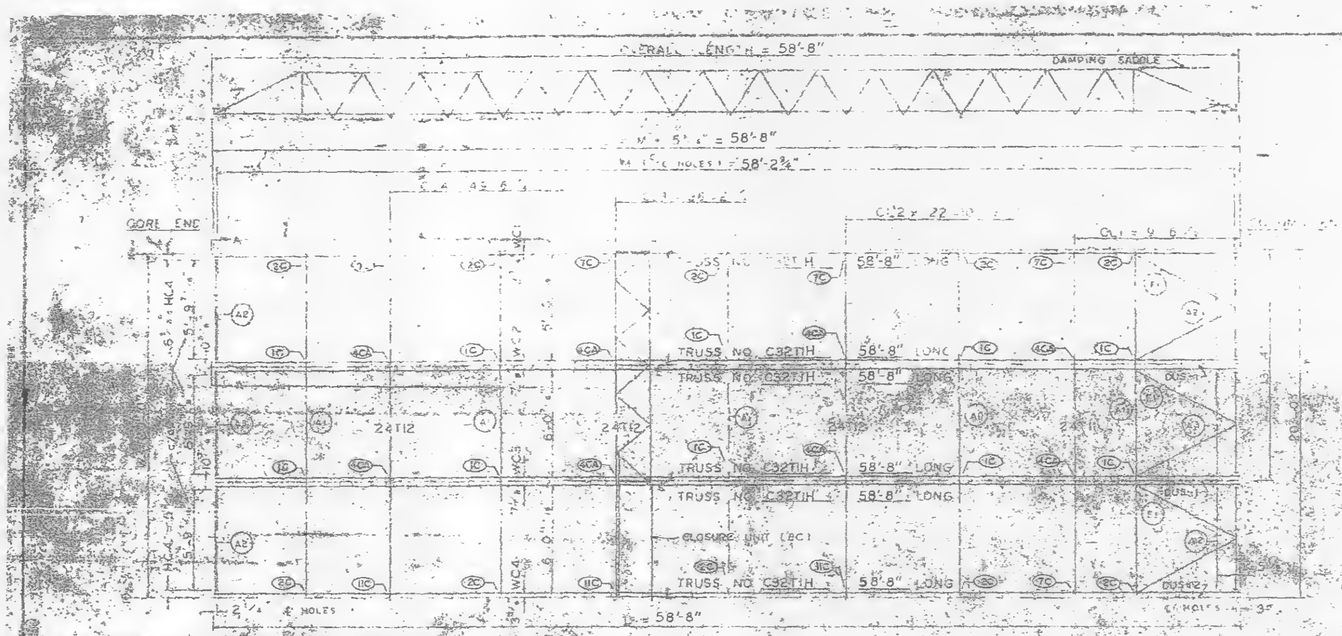



DIMENSION HCA ARE RELATED TO HOLES PUT IN BEARING END OF FLOOR TRUSSES WHICH ARE SIMILAR BUT NOT EXACTLY ALIGNED WITH HOLE C OR COLUMN CLIPS & BRACES.

PANEL NO C1H SIZE 20'-0" x 58'-8"

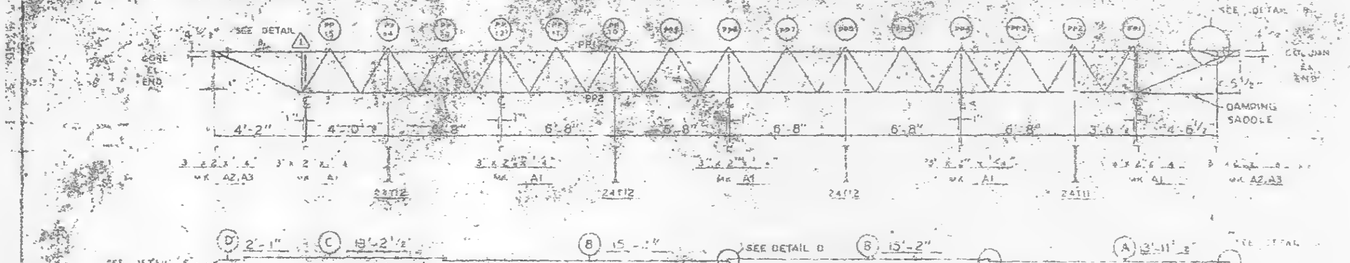

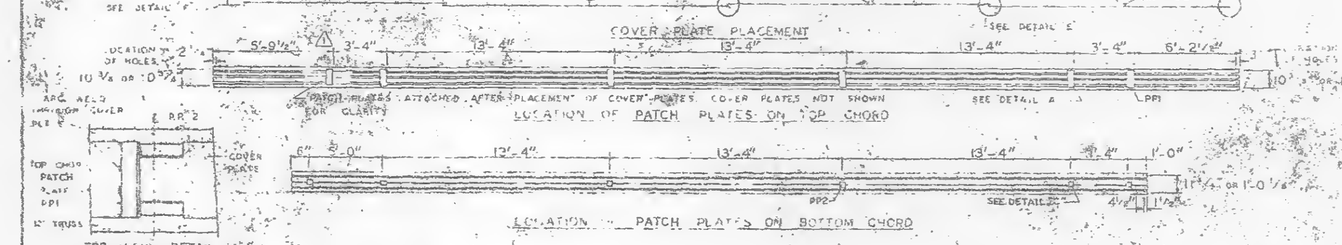


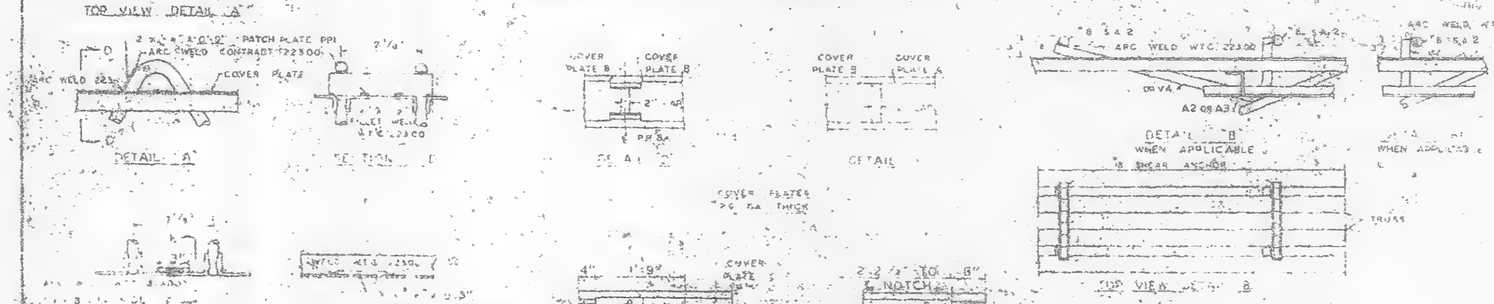

NOTE ALL ARC WELDS TO BE MADE WITH LOW HYDROGEN RODS IN THE E-70 SERIES OR EQUAL. UNLESS SHOWN OTHERWISE ALL CONNECTION ARC WELDS SHALL BE 1/4" FULL THROAT FILLET.




TYPICAL PEAK OF TOP CHORD COLUMN END DIAGONAL TRUSS BRACE PLATES OVER DECK B W.T.C. 223.00




CLIP ANGLE LOCATION FOR DIAGONAL FLATS 4¼" ABOVE COLUMN CLIPS FOR TRUSS BEARING.

REQUIRED MATERIAL PER PANEL

| MATERIAL | MK | QTY | SIZE | |
|---|---|---|---|---|
| FLOOR TRUSSES | TH | 4 | 32TH 58'-8" | |
| GIRDER "P" PIECES | T1L | 1 | 24T12 - 19'-4" | |
| | T1R | 1 | 24T12 - 19'-4" | |
| ANGLE | A1 | 5 | 3"x2½"x¼" x 6'-0" | ST 36 |
| | A2 | 6 | 3"x2½"x¼" x 6'-6½" | ST 36 |
| | A3 | 7 | 3"x2½"x¼" x 5'-10½" | ST 36 |
| DIAGONAL FLAT | F1 | 6 | 1'-9" x 1'-4" x ½" | ST 36 |
| PATCH PLATE | PP1 | 18 | 2'-0" x 1'-4" x ¼" | ST 36 |
| | PP2 | 18 | 3'-4" x 1'-8" x ¼" | ST 36 |
| COVER PLATES | A | 16 | 58'-8" x 5" x ½" | |
| | B | 3 | 58'-8" x 8" x ½" | |
| | C | 3 | 58'-8" x 6" x ½" | |
| | D | 3 | 58'-8" x 8" x ½" | |
| ANGLE CLIPS | C1 | 21 | 3"x2½"x¼" x 1'-0" | |
| ¾" DIA. ANCHOR | SAZ | 8 | | |
| DAMPING SADDLE | DDS-1 | 2 | ½" x 5" x 1'-0" | |
| | DDS-2 | 1 | ½" x 5" x 1'-0" | |
| CONNECTION BAR | CB1 | 6 | ½" x 11" x 2'-3" | ST 36 |
| CLOSURE UNIT | CBC | 3 | 2 x ½" x 1'-0" | |
| CONNECTION PLATES | P1 | 5 | ½" x 1'-0" x 1'-0" | ST 36 |
| | P2 | 4 | ½" x 1'-0" x 1'-0" | ST 36 |
| | P3 | 1 | ½" x 1'-0" x 1'-0" | ST 36 |

LETTERS AND NUMBERS IN ELLIPSES, ie. (CC) INDICATE CONNECTION DETAILS SHOWN ON SHEET CD 201, CD 202 OR CD 204.

| NO | DATE | REVISION |
|---|---|---|
| ⚠ | 6-8-65 | AS NOTED |

⚠ ADDED BLDG. 8 FLOORS 79-80 (WEST)

THE PORT AUTHORITY OF NEW YORK AUTHORITY

BLDG. 8 FLOORS 79-80(N)

PANEL C1H SIZE 20'-0" x 58'-8"

BLDG. 8 FLOORS 79-80 (WEST) ⚠

FABRICATED BY JACKSON STEEL COMPANY

ERECTED AT MADISON, ILLINOIS

DESIGN DRAWING NO. 7-22-66

APPROVED FOR FABRICATION DATE 10-24-66

APPROVED FOR ERECTION DATE 10-24-66

H