
SKILLING - HELLE - CHRISTIANSEN - ROBERTSON Structural & Civil Engineers

PROJECT THE WORLD TRADE CENTER | TITLE TRUSS DETAILS | DATE 5-15-67


REVISIONS

5-1-68


4-18-69

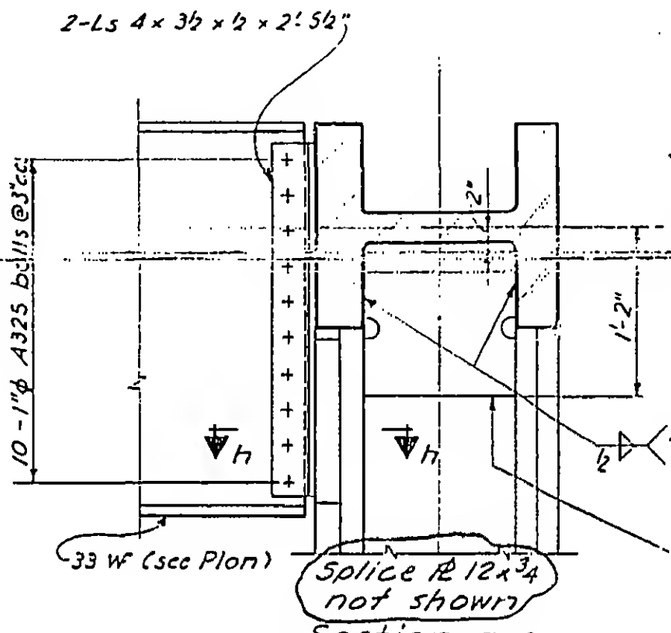


Section g-g

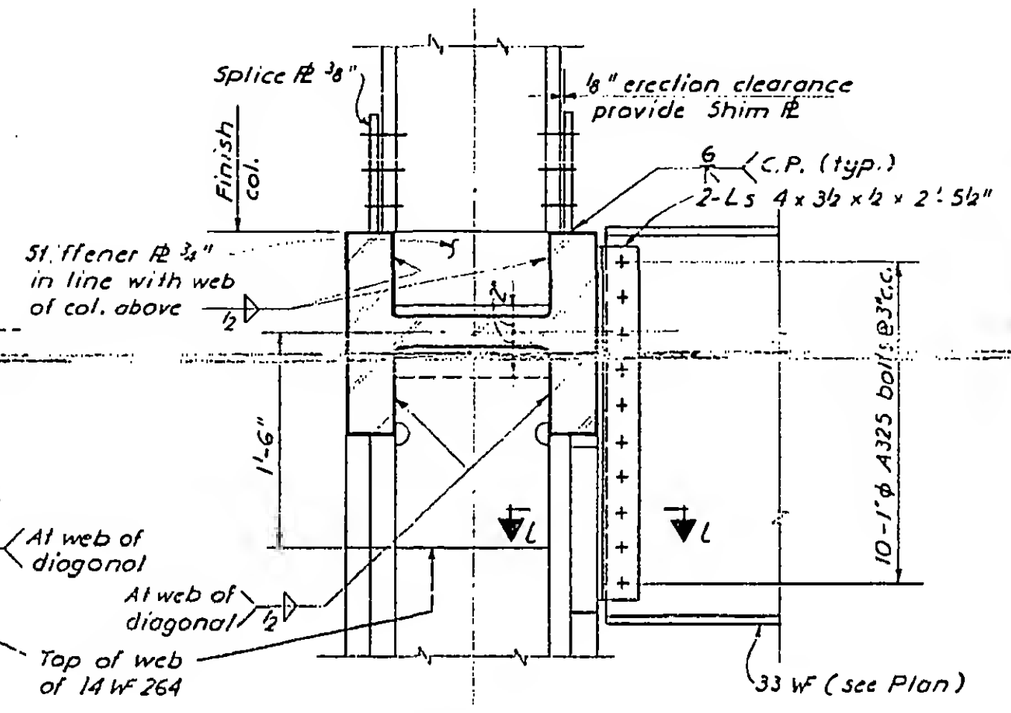

Section k-k

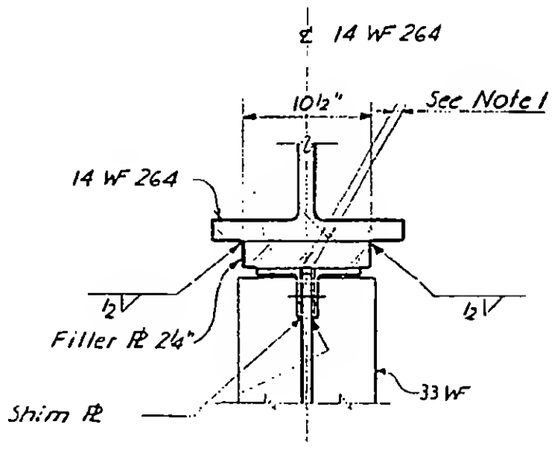

Section h-h

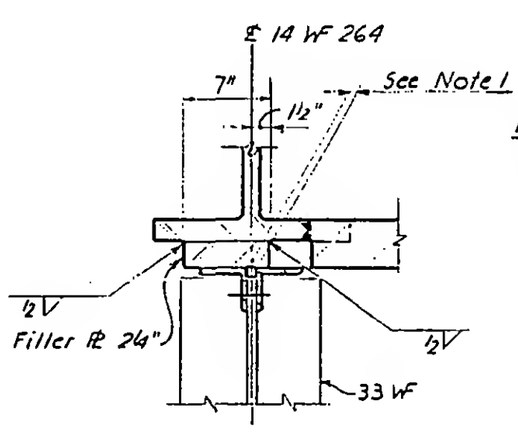

Section l-l

Note 1 :
Erection clearance each side of beam web should not be more than 1/16". Provide shim between beam web and L's if required to insure surface contact for H.S. bolts.



DRAWN A.F.

REVIEWED E.L.

11-JK2-23