

REVISIONS

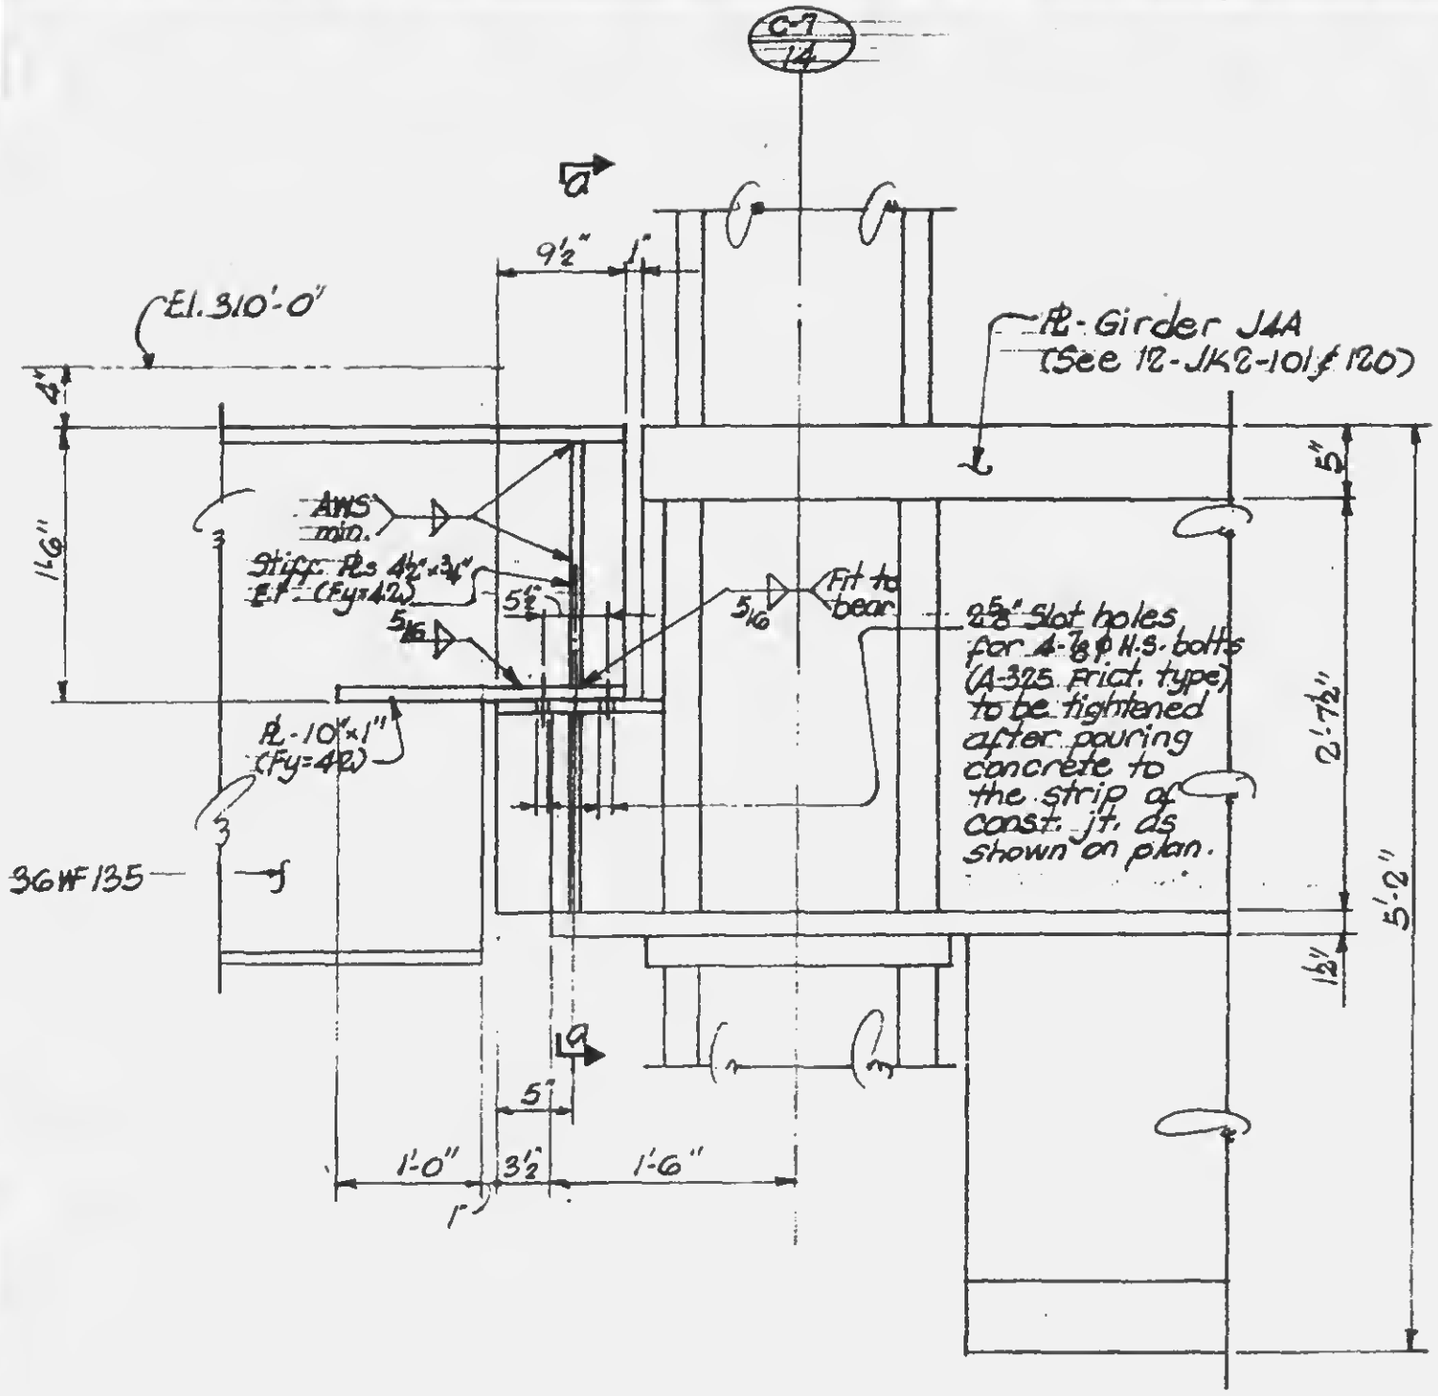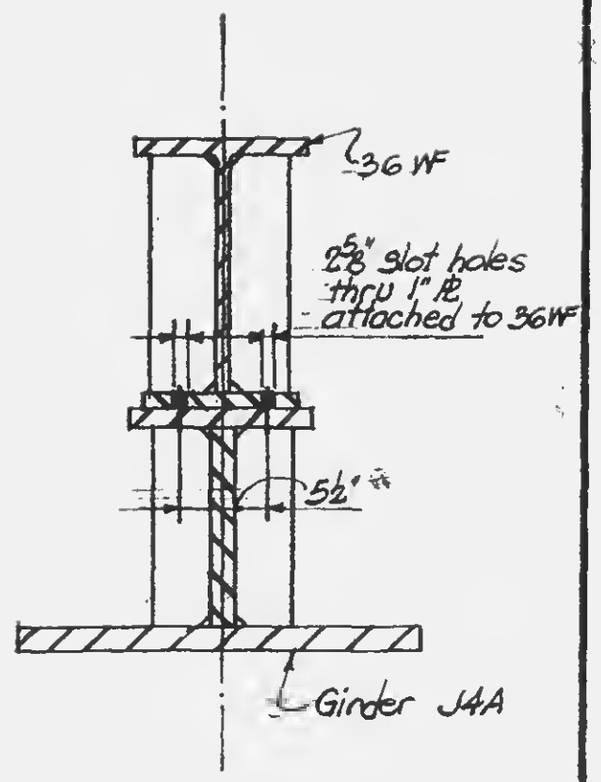


Section a-a

NOTES:

1. Provide washers 2½x⅝ (square or round) with Fy=50 KSI for all bolts over slot holes.

LICENSED PROFESSIONAL ENGINEER
LESLIE E. ROBERTSON
No. 34360
UNIVERSITY OF THE STATE OF NEW YORK

DESIGNED

DRAWN
S.T.M.

REVIEWED
E.L.

12-JK3-9