
SKILLING, HELLE, CHRISTIANSEN, ROBERTSON — Structural & Civil Engineers

PROJECT: THE WORLD TRADE CENTER | TITLE: TEL/CO REVISIONS- TOWER B FL. 11&12 | DATE: 7-9-71

REVISIONS


Col. Nos. 151, 153, 307, 309 Fl. 11 & 12
See Dwg. 68330-A-106 & A-107

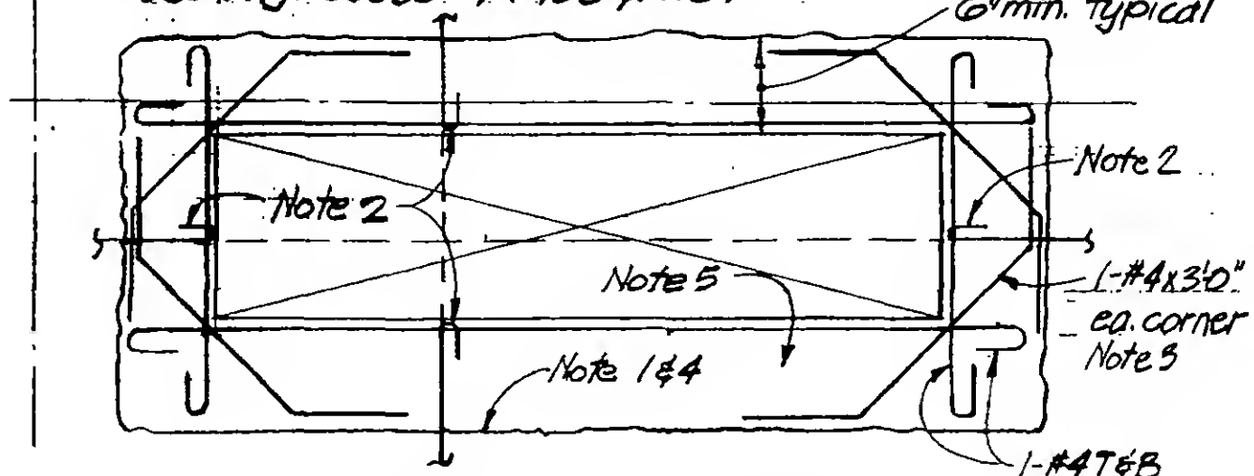

1'-0" x 4'-0" openings


Notes:
1. Remove existing concrete to line indicated without damaging existing reinf.
2. Cut existing reinf. and hook at edge of opening.
3. Add new reinf. as indicated.
4. Clean face of exist. concrete and thoroughly coat entire surface with epoxy bonding compound.
5. Cast slab to edge of new opening using approved "non-shrink" fc = 4000psi concrete.
6. Slabs to be shored as required before removing exist. concrete.

Col. 210, 223, 239, 246 Fl. 11
Col. 210 Fl. 12
See Dwg. 68330-A-106 & A-107

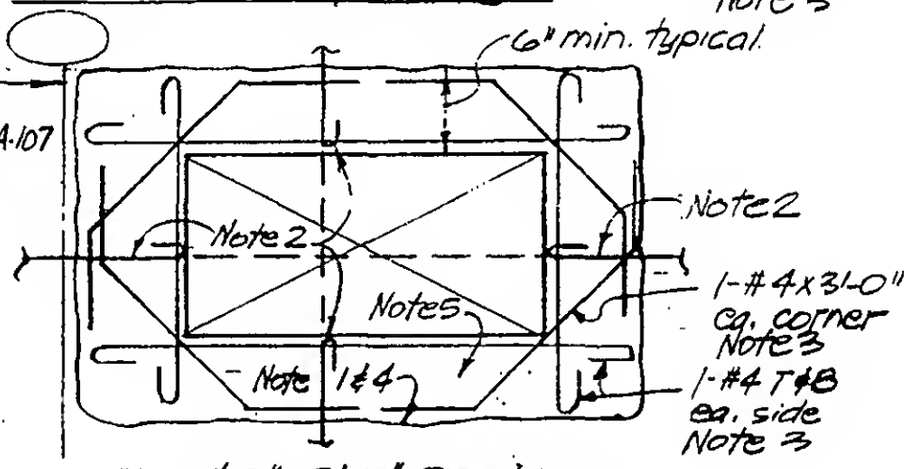

1'-0" x 2'-0" Openings
Floor 11&12 as noted

Col. 223, 239, 246 Fl. 12
See Dwg. 68330-A-107

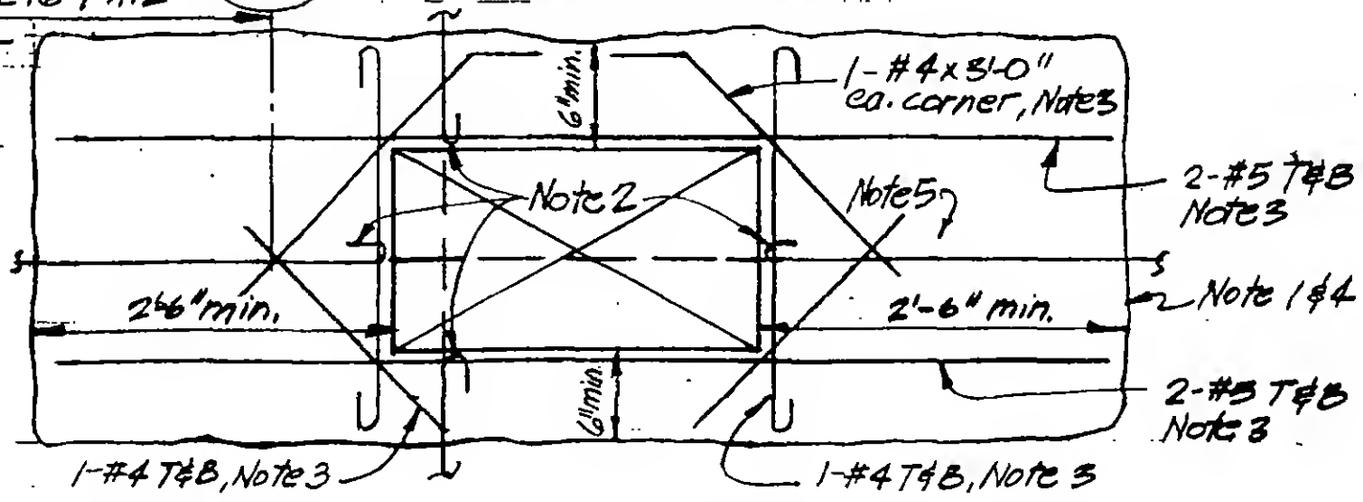

1'-0" x 2'-0" Opening
Floor 12 as noted

LICENSED PROFESSIONAL ENGINEER — LESLIE E. ROBERTSON — No. 34360 — UNIVERSITY OF THE STATE OF NEW YORK

DESIGNED

DRAWN P.M. Cecchi

REVIEWED

19-8-1100