

NOTES

1. FOR GENERAL NOTES, KEY TO MATERIALS, SYMBOLS, ABBREVIATIONS, FINISH SCHEDULES, DOOR SCHEDULES & SCHEDULES OF DRAWINGS SEE SHEET "A" NO. 1 TO SHEET NO. 5.
2. FOR COMPLETE 8 3/4" FLOOR PLAN SEE SHEET "A" NO. 2.
3. ALL ELEVATIONS GIVEN THUS 0'-0" ARE IN RELATION TO FINISH FLOOR.
4. FOR MECHANICAL & ELECTRICAL LAYOUTS SEE ASSOCIATED ENGINEERS DRAWINGS.
5. FOR TYPICAL STAIR DETAILS SEE DWG'S A-A-B-201 AND A-A-B-202.
6. ALL TRENCH HEADERS TO BE RELAPPED AT UNDERSIDE OF SLAB MIN. A WIDTH OF 4'-0" WITH A SUPPLY OF TYPE OF RELAPPING SEE ARCHITECTURAL SPECIFICATIONS FOR TYPE & ELECTRICAL ENGINEERS & CONTRACTORS APPROVED SHOP DWGS. FOR LOCATION & EXTENT OF TRENCH HEADERS & RELAPPING.
7. FINISH FLOOR ELEVATION AND TOP OF SLAB ELEVATIONS ARE EQUAL UNLESS OTHERWISE SHOWN OR NOTED.
8. BRONZE EYES DISPENSERS AT ALL MEN AND WOMEN'S TOILETS.
9. FOR CONVECTOR & CABINET ACCESS DOORS TO HOT DISPENSER VALVES TO BE LOCATED IN ACCORDANCE WITH C.E. DETAIL SEE TYPICAL DWG. A-A-B-201.
10. WHERE NO FURRED CEILINGS ARE SHOWN FOR, EVEN IF IN CLOSETS, STAIR, MECHANICAL ETC. BOTTOM ELEVATION OF ALL BEAMS AND DUCTWORK SHALL BE MAINTAINED AT 8'-0" ABOVE FINISHED FLOOR TO ALLOW FOR SUITABLE CEILING INSTALLATION AND CLEARANCE OF FULL 7'-0" DOORS.
11. EXTENT OF PUBLIC CEILING AS INDICATED THUS
12. CAULTS REQUIRED ON ALL BEAM PROJECTIONS OVER 6" (GENERAL) DIMENSION ON ELEVATION, WHERE SLAB OR WALL BE WIDENING 24" FROM HORIZONTAL SEE TYPICAL DETAILS.
13. FOR SHEETROCKS ON BRICK STRADDLE COLUMNS AND TYPICAL PARTITION DETAILS SEE DRAWINGS A-A-B-203 TO A-A-B-207.

NORTH



PART PLAN AT 71ST FLOOR

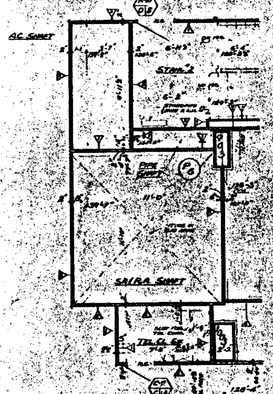

PART PLAN AT 71ST FLOOR

BULLETINS NOT DATED ARE IN THE PROCESS OF COMPLETION

CONTRACT	NO.	DRAWING	DATE	BY
		1-30-70	A-51	LJL
		1-30-70	A-52	LJL
		1-30-70	A-67	LJL
		5-25-69	A-51	DG
		5-25-69	A-52	DG
		5-25-69	A-17	DG
		5-25-69	A-95	DG
		8-1-68	A-10	DG
8-18-71	A-106	8-28-68	A-6	DG
5-15-70	A-75	4-29-68	A-5	DG
NO. DATE	BUL. NO.	NOTE	BUL. NO.	BY

REVISIONS

REVISIONS

REGISTERED ARCHITECT

APPROVED

CHIEF, PLANNING DIVISION

DATE

THE WORLD TRADE CENTER

THE PORT OF NEW YORK AUTHORITY

MINORU YAMASAKI & ASSOCIATES
MINORU YAMASAKI, ARCHITECT

WORTHINGTON, SKILLING, HELLE & JACKSON
STRUCTURAL ENGINEERS

JOSEPH R. LORING & ASSOCIATES
ELECTRICAL ENGINEERS

EMERY ROTH & SONS
RICHARD ROTH, ARCHITECT

JAROS, BAUM & BOLLES
MECHANICAL ENGINEERS

THE PORT OF NEW YORK AUTHORITY
PAVING, RESTUTTING, FOUNDATIONS

TITLE: 70TH & 71ST FL. CORE PLAN

SCALE: 1/8" = 1'-0"

DRAWING NO. A-113