


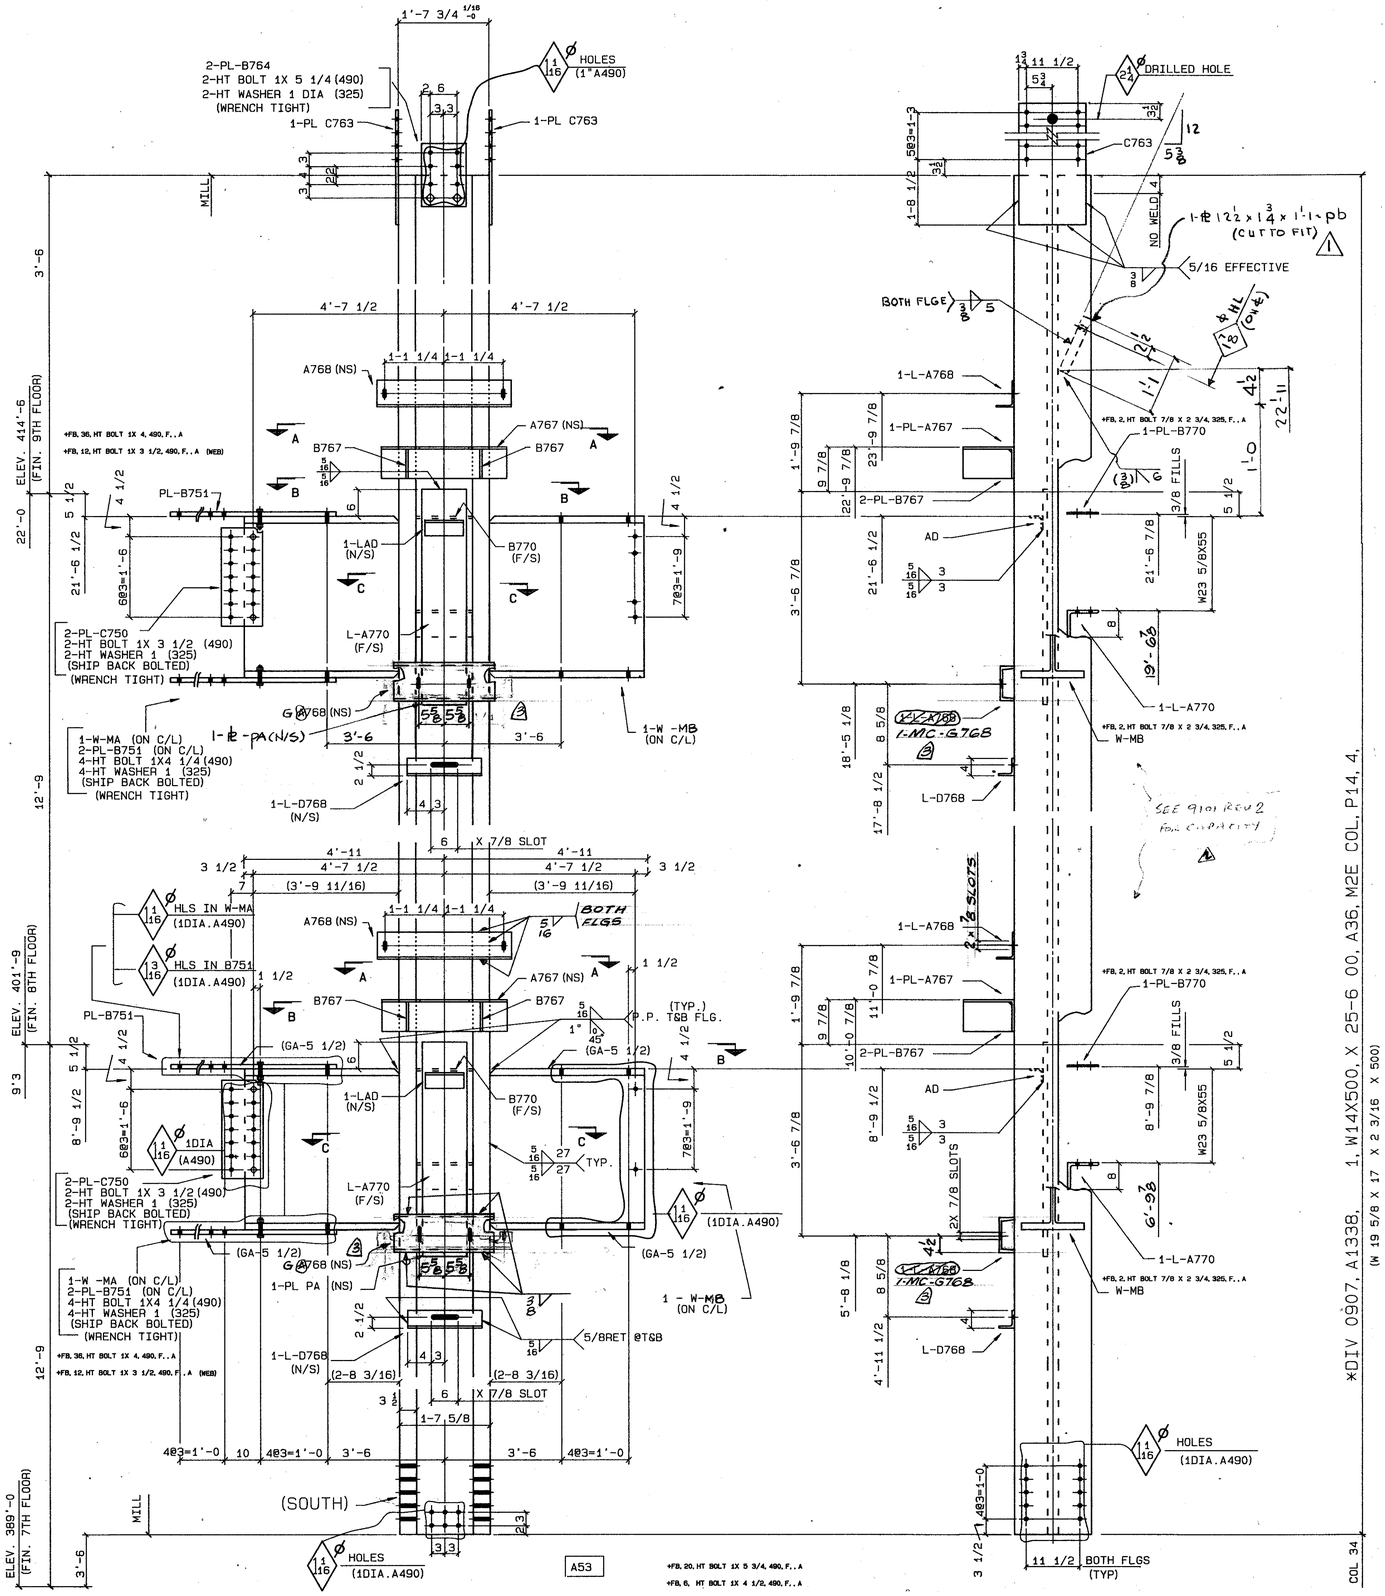


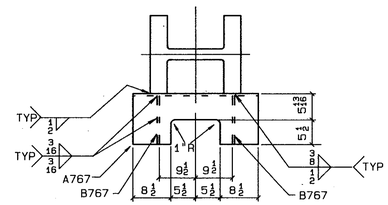

SECTION - A-A

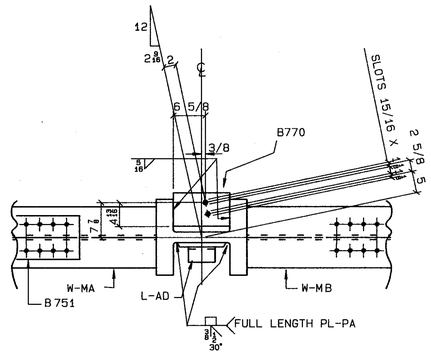

SECTION - B-B

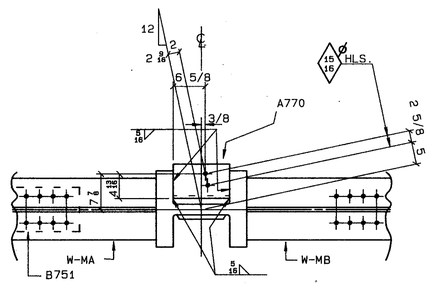

SECTION-C-C

MATERIAL

: 4, PI 006 1/2 X00 3/8, X 0-10 3/4, B767, 44W, ... A
: 2, PI 010 00 X00 5/8, X 1-2 00, B764, 44W, ... A
: 2, PI 017 7/8 X00 1/2, X 2-4 00, A767, 44W, BENT, . . . A
: 2, PI 015 00 X00 5/8, X 3-1 1/2, C763, 44W, ... A

: 2, PI 006 1/2 X00 3/8, X 1-0 1/2, B770, 44W, ... A
: 4, PI 009 00 X00 7/8, X 3-1 1/2, B751, 44W, ... A
: 4, PI 010 1/2 X00 1/2, X 1-9 1/2, C750, 44W, ... A
: 2, L 6 X 4 X 5/16, X 2-6 00, A768, 44W, ... A
: 2, L 8 X 6 X 3/4, X 1-0 1/2, A770, 44W, ... A
: 2, L 3 X 3 X 3/8, X 0-8 00, AD, 44W, ... A
: 2, L 4 X 3 X 3/8, X 1-2 00, D768, 44W, ... A
: 2, W36X245, X 3-11 11/16, MA, A36, P1E CUT B774, P96, 9, , A
: 2, W36X245, X 3-11 11/16, MB, A36, P1E CUT C774, P96, 9, , A
: 2, HTBOLT 1X5 1/4, , 490, ... A

: 4, HTBOLT 1X3 1/2, , 490, ... A
: 8, HTBOLT 1X4, , 490, ... A
: 14, HT WASHER 1, , 325, ... A
+FB, 138, HT WASHER 1, 325, , , A

: 1, 1F 3/16, X12-0 00, , A
: 1, 1F 5/16, X40-0 00, , A
: 1, 6G 1, X11-0 00, , A

: 1, 1F 1/2, X3-6 00, , A
: 1, 3G 10.0, X16-0 00, , A
: 1, 1F 3/8, X8-0 00, , A
+FB, 122, HT WASHER 1, 325, , , A

: 2, PI 011 1/2 X00 3/8, X 4-0 00, PA, 44W, P2S, . . . A
1-FL 12 1/2 x 1 3/4 x 1'-1" PB (44W) CUT TO FIT
2 2-9MC x 25.4 x 1'-10 - G768 (A36) (P217/2)

SHOP NOTES
MATERIAL G40.21-44W U/N
E70 SERIES ELECTRODES
REF. DWGS. E8, E9, 9111, E118A, CW1, 9101, E117

James 7/85 R
May 13/85

DIM'S SHOWN IN BRACKETS ARE BASED ON ACCURATE COL SIZES.

SHOP SCRIBE VISIBLE C/L ON BOTH FLGS & B/S WEB TOP & BOTT.

FOR 1DIA.A490

X30'
#PB ADDED (GUY SUPPT)

R	DATE JUNE 5/85 BY GM	SPEC	AS NOTED	FRANKEL STEEL LIMITED	
E	DATE MAY 13/85 BY FR	HOLES	1 3/16 DIA U/N	220 ATTWELL DRIVE, UNIT 1, REXDALE, ONTARIO M9W 5B2	
V	DATE MAY 8/85 BY EC	FINISH	NONE		
MADE 27 GM/MX	DATE APR85	SQUAD FR	PROJECT: 7 WORLD TRADE CENTER	CONTRACT 84-152	DWG. NO. 1338
CHK'D 28 GP	DATE 30 APR 85		DETAIL: COLUMN (5TH TIER) ZONE 2		