

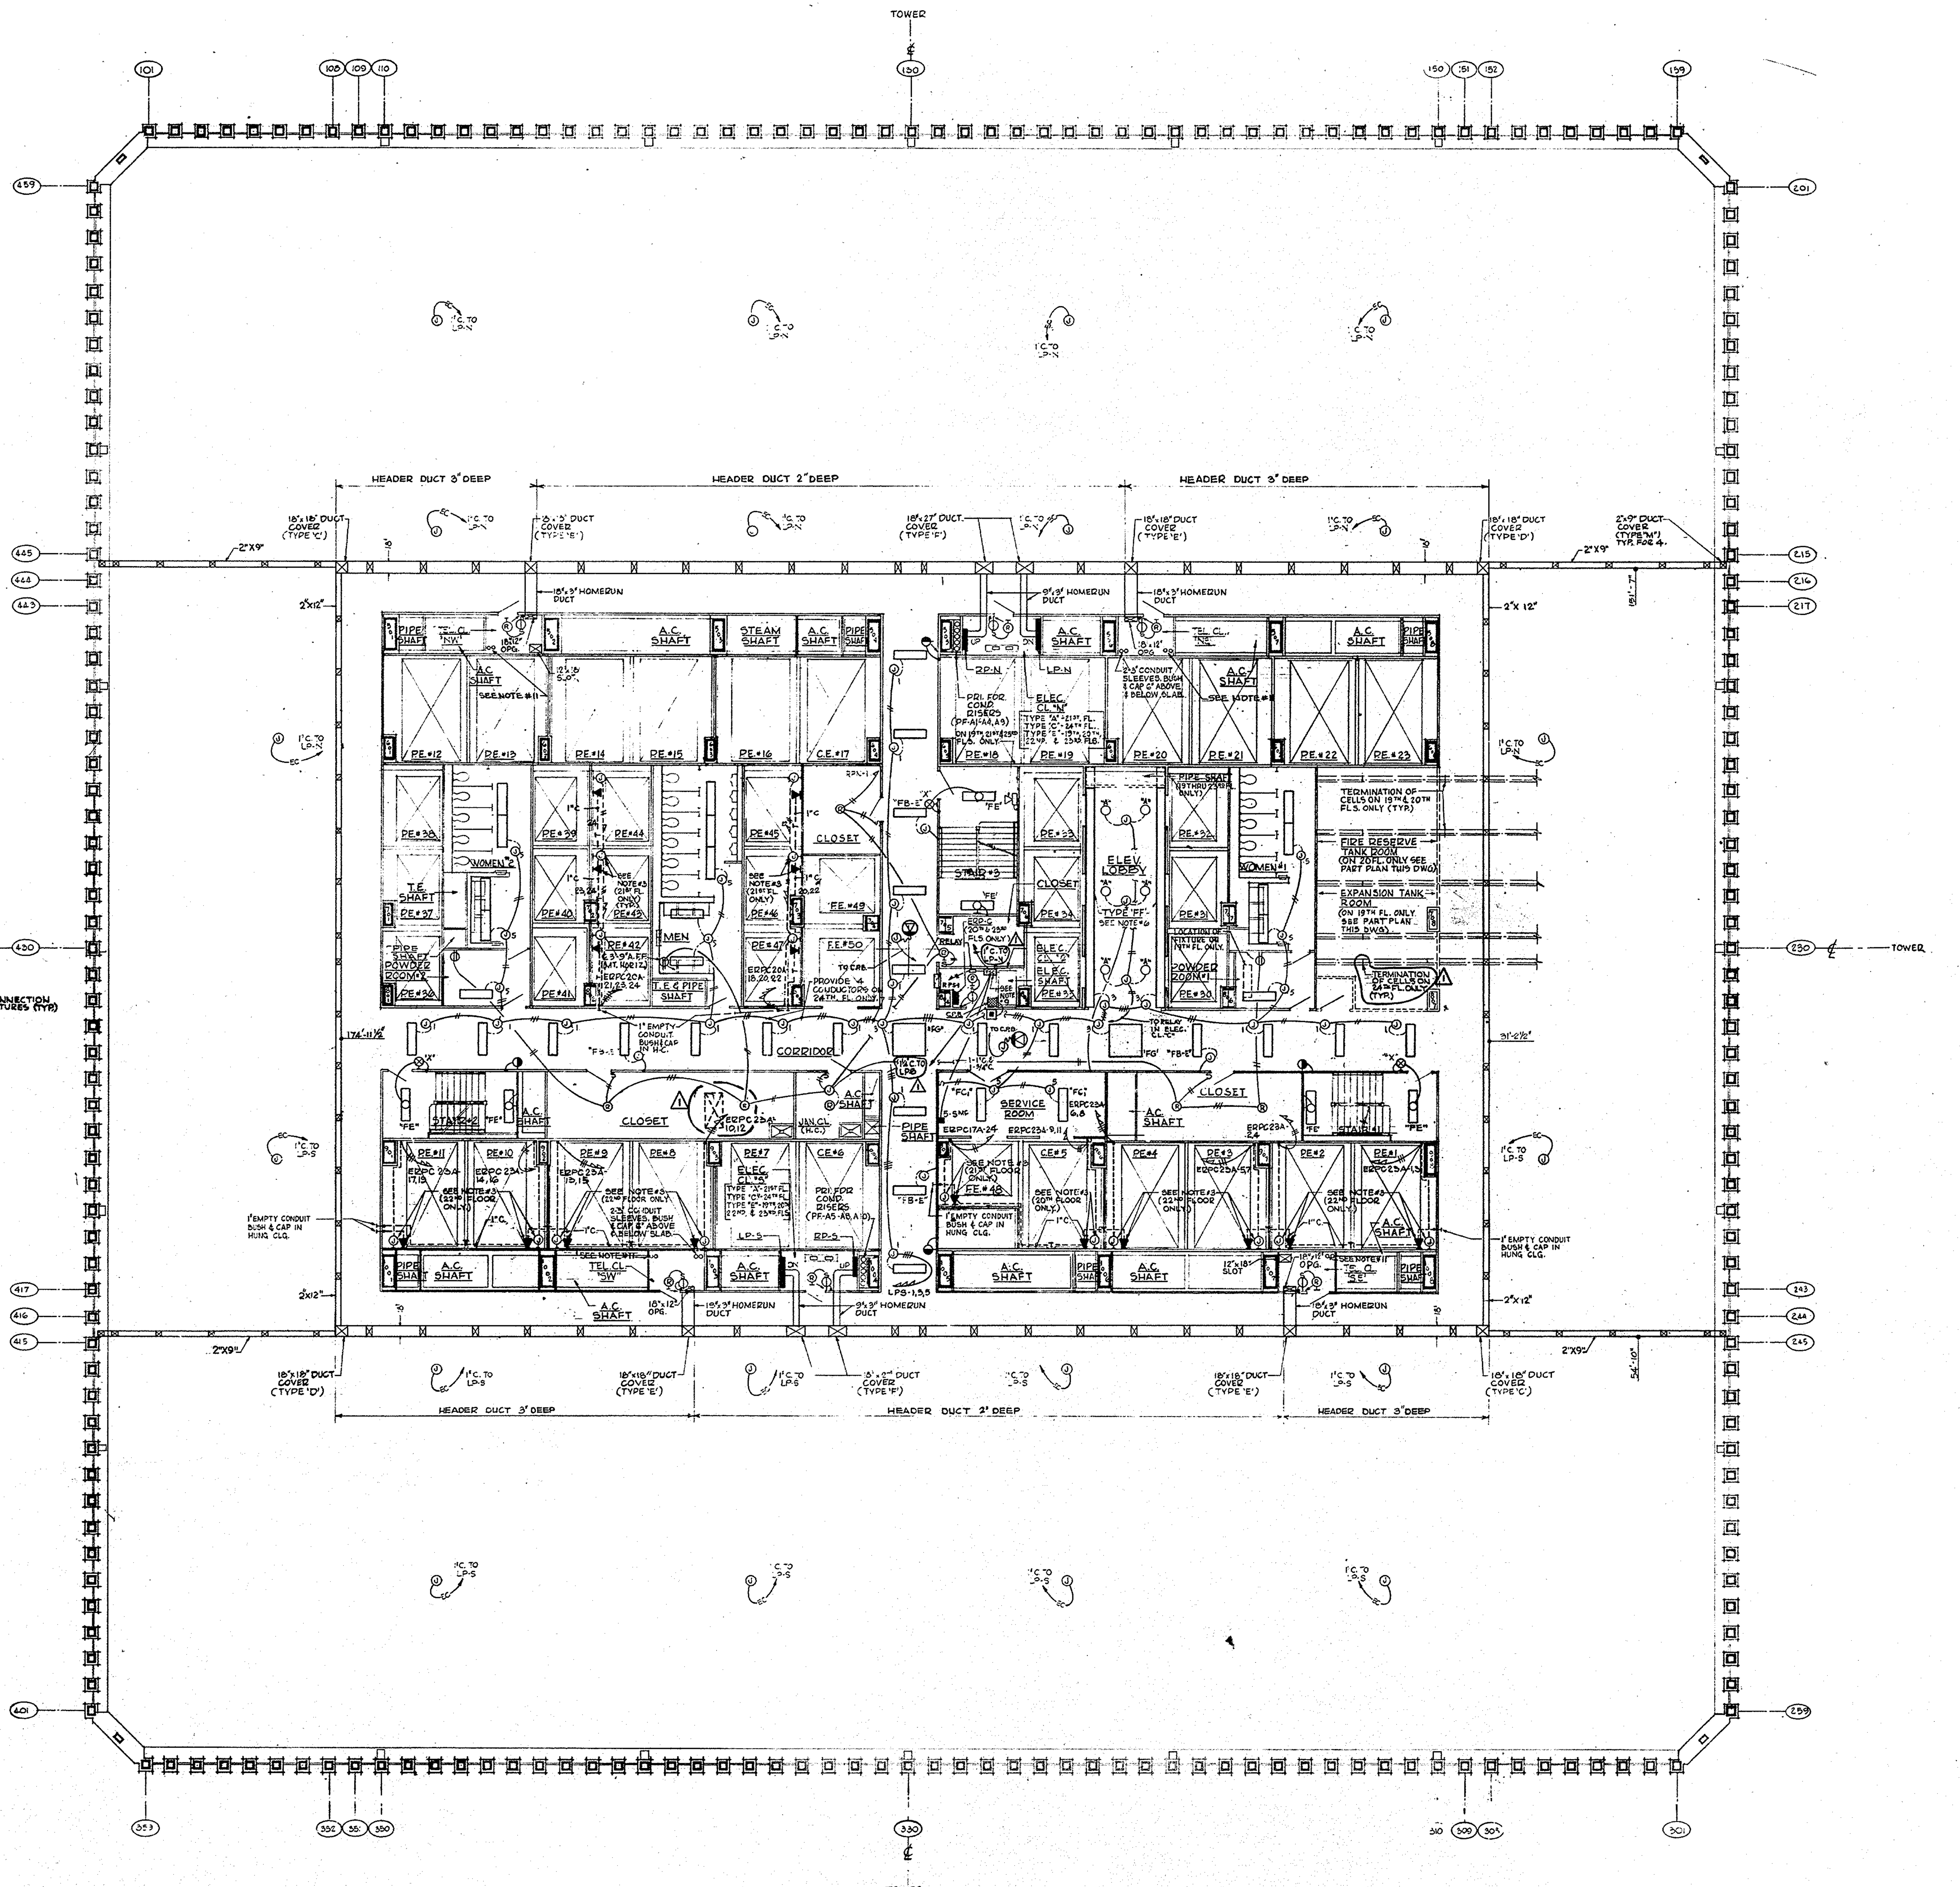


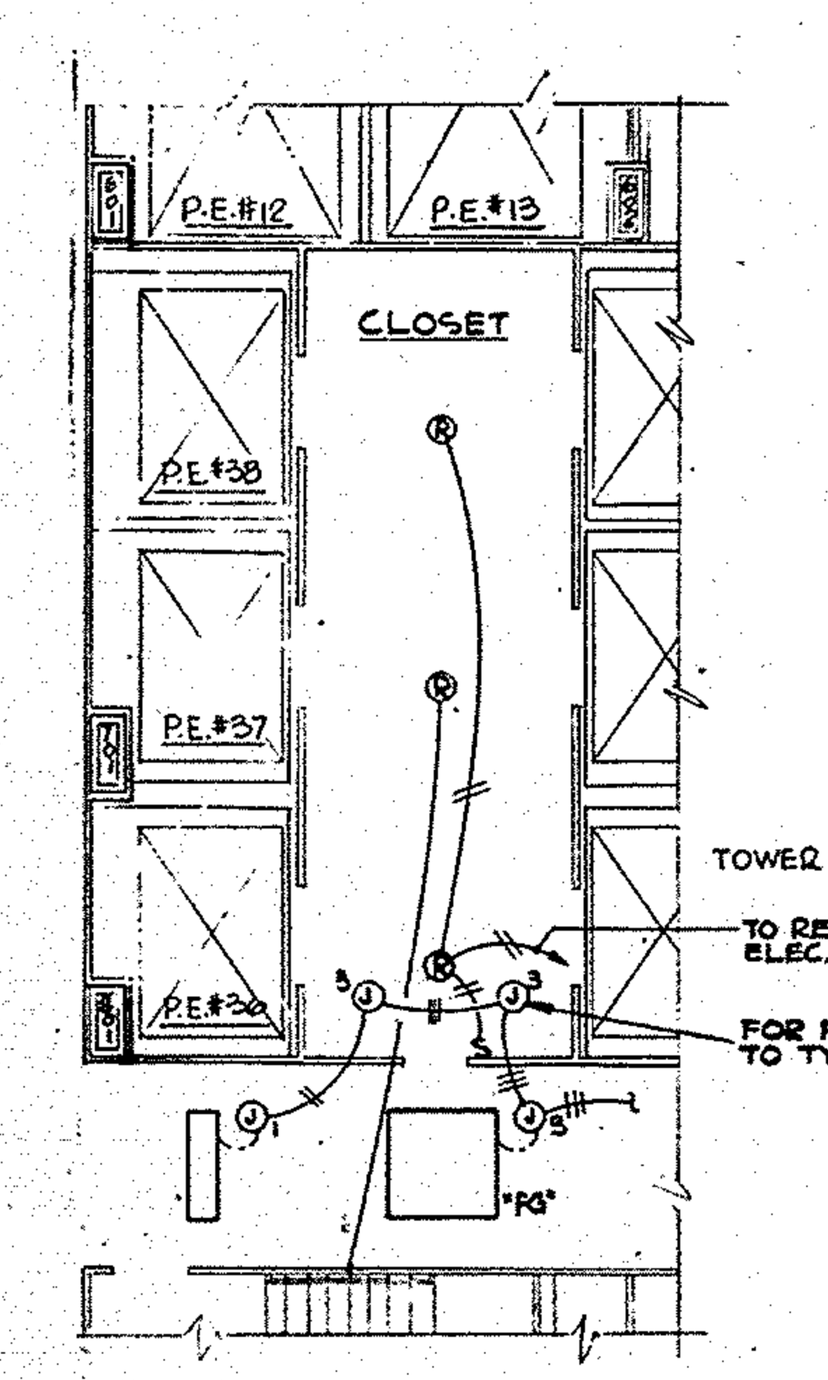

PART PLAN OF CLOSET 24TH FLOOR

SCALE: 1/8" = 1'-0"

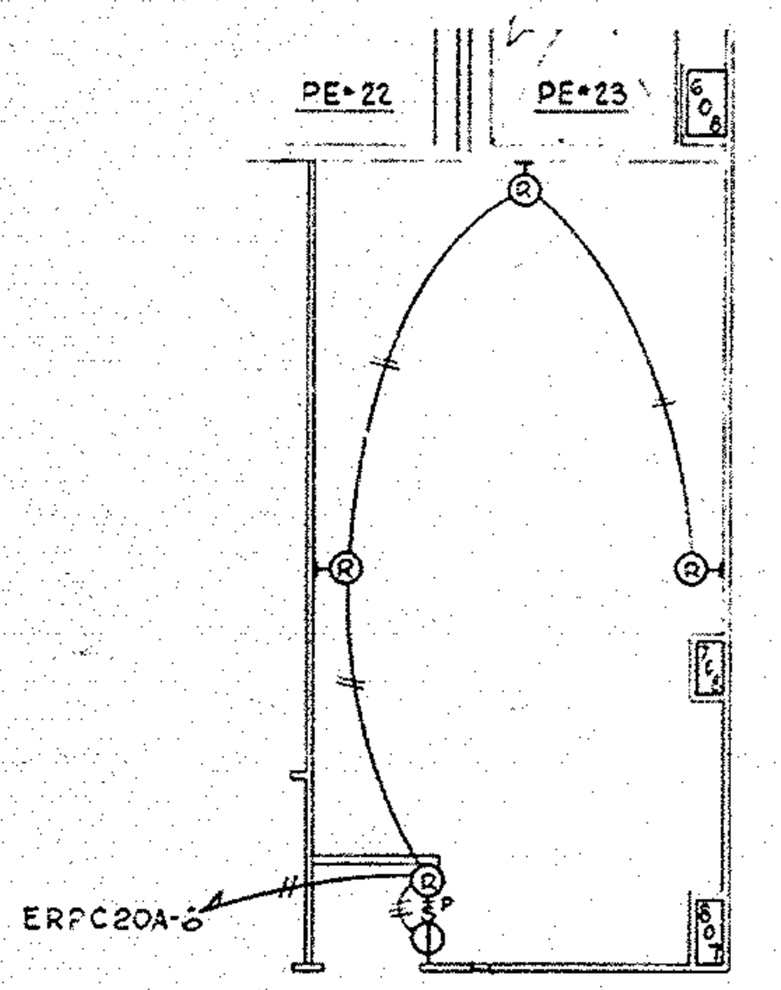


PART PLAN OF EXPANSION TANK ROOM – 19TH FLOOR

SCALE: 1/8" = 1'-0"


NOTES

1. UNLESS OTHERWISE SHOWN, THE ARRANGEMENT AND LOCATION OF ALL POWER AND TELEPHONE CELLS SHALL BE TYPICAL TO THAT SHOWN ON DRAWING # E-A-16.
2. REFER TO DRAWING E-A-16 FOR ADDITIONAL ELECTRICAL FLOOR SYSTEM NOTES AND DIMENSIONS.
3. LOCATE AT CENTER OF RISE WHERE INDICATED ON APPROVED ELEVATOR SHOP DRAWINGS.
4. ALL CORRIDOR AND POWDER ROOM 1'×4' FLUORESCENT FIXTURES SHALL BE TYPE "FB" UNLESS OTHERWISE NOTED.
5. ALL TOILET ROOM FLUORESCENT FIXTURES SHALL BE TYPE "FC", OF 7-4' SECTIONS.
6. SPECIAL TYPE "FF" FLUORESCENT FIXTURE IN CONTINUOUS ROW CONSISTING OF 7-4' SECTIONS.
7. VERTICAL CONDUIT RISERS FOR ALL ELECTRIC AND TELEPHONE CLOSET LIGHTS AND CONDUIT ELEVATOR SHAFTS SHALL BE RUN EXPOSED.
8. ALL VERT. COND. & OUTLETS CONCEALED IN WALLS SHALL NOT BE CLOSER THAN 20" FROM FINISH DOOR OPENING.
9. REFER TO DRAWING # E-A-118 FOR TYPICAL WIRING DIAGRAM SHOWING METHOD OF CONTROLLING REMOTE CONTROL SWITCHES AND RELAY IN LIGHTING PANELBOARDS.
10. REFER TO DRAWING # E-A-16 FOR ADDITIONAL NOTES.
11. 2-1½" CONDUIT SLEEVES FOR FUTURE MASTER TV ANTENNA SYSTEM. BUSH AND CAP 6" ABOVE AND BELOW SLAB.

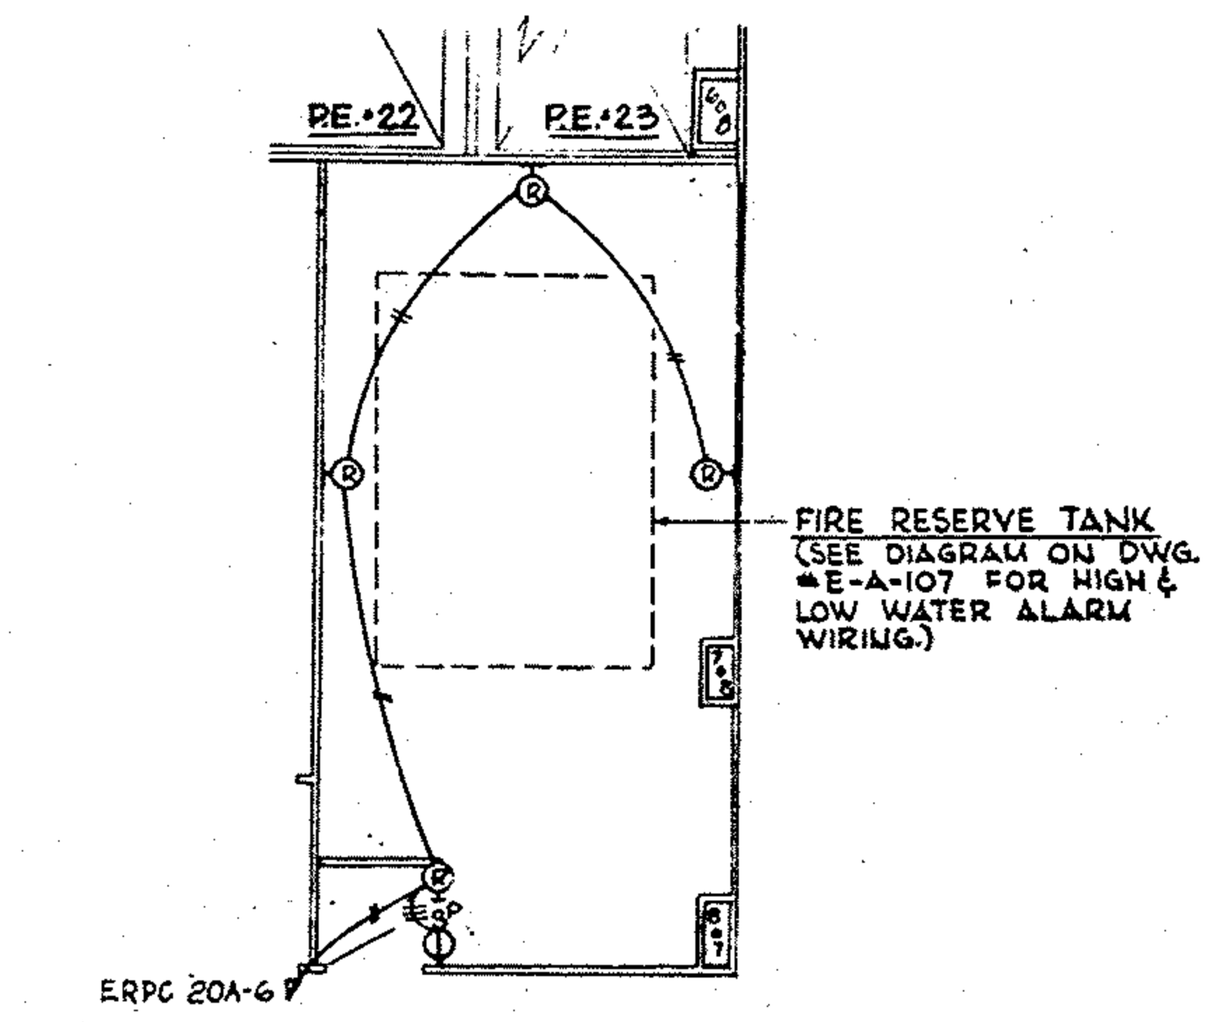

PART PLAN OF FIRE RESERVE TANK ROOM - 20TH FLOOR

SCALE: 1/8" = 1'-0"

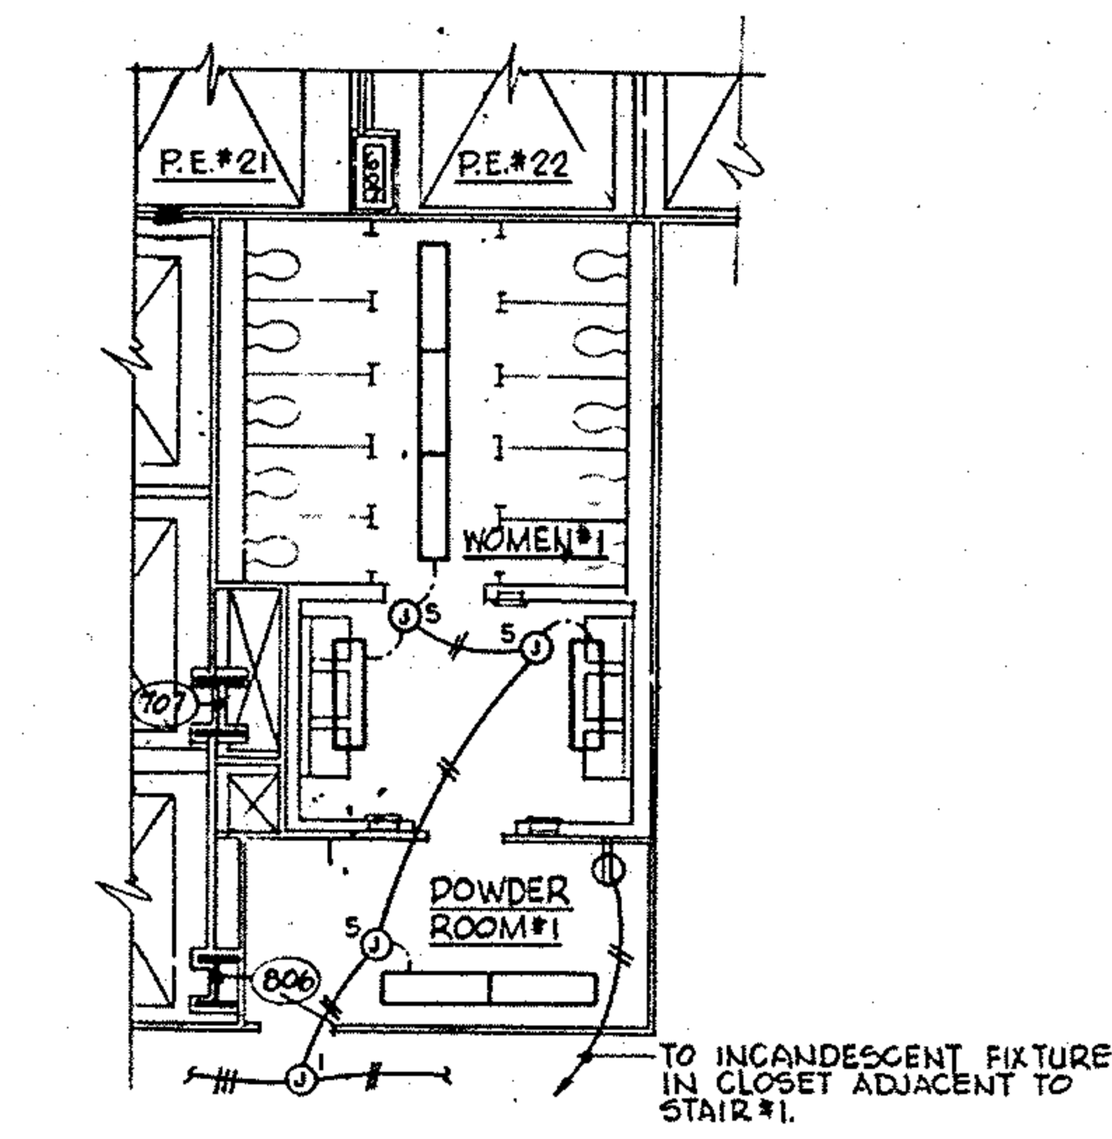

PART PLAN OF WOMENS TOILET - 24TH FLOOR

SCALE: 1/8" = 1'-0"

SCHEDULE OF ELECTRICAL ALLOWANCES

FLOOR NO.	NET RENTABLE AREA. (S.F.)	20"×100" 6 LAMP TENANT STANDARD FIXTURE. 1/150 ⏀' TYPE "FA"	STANDARD WIRING METHOD. JUNCTION BOX IN CEILING. (BASE BID ONLY) 1/300 ⏀	PLUG-IN CEILING WIRING ASSEMBLY (ALTERNATE BID ONLY) 1/450 ⏀'	12"×48" 2-LAMP CORE CORRIDOR FIXTURE W/JUNCTION BOX IN CEILING. TYPES "FB" & "FB-E"	DUPLEX RECEPTACLE FLOOR SERVICE FITTING (BASE BID ONLY) 1/125 ⏀'	TELEPHONE FLOOR SERVICE FITTING (BASE BID ONLY) 1/400 ⏀'	COMBINATION RECEPT-TELEPHONE FLOOR SERVICE FITTING (ALTERNATE BID ONLY) 1/120 ⏀'
19	37,362	260	130	85	7	315	95	330
20	37,362	260	130	85	7	315	95	330
21	37,880	260	130	85	7	315	95	330
22	37,880	260	130	85	7	315	95	330
23	37,880	260	130	85	7	315	95	330
24	37,911	260	130	85	7	315	95	330

ADD 2 TYPE "X" EXIT LIGHTS PER FLOOR AS PART OF ALLOWANCES (SEE SPECIFICATIONS).

CONTRACT BID DRAWING date OCT. 16, 1967

NO.	DATE	BUL. NO.	BY	NO.	DATE	BUL. NO.	BY
1	12-15-67						

REVISIONS — REVISIONS

LICENSED PROFESSIONAL ENGINEER · JOSEPH R. LORING · 28344 · STATE OF NEW YORK

APPROVED

CHIEF, PLANNING DIVISION

DATE

THE WORLD TRADE CENTER

THE PORT OF NEW YORK AUTHORITY

MINORU YAMASAKI & ASSOCIATES
MINORU YAMASAKI, ARCHITECT

EMERY ROTH & SONS
RICHARD ROTH, ARCHITECT

WORTHINGTON, SKILLING, HELLE & JACKSON
STRUCTURAL ENGINEERS

JAROS, BAUM & BOLLES
MECHANICAL ENGINEERS

JOSEPH R. LORING & ASSOCIATES
ELECTRICAL ENGINEERS

THE PORT OF NEW YORK AUTHORITY
PAVING, UTILITIES, FOUNDATIONS

1/8" = 1'0" scale 5 0 5 10 15 20 feet

TITLE: LIGHTING AND POWER 19TH - 24TH FLOORS

DRAWN	Z.F.H.	CHECKED	J.Z.L.
SCALE	1/8" = 1'-0"	DATE	
PROJECT NUMBER		SHEET	16 OF 114
DRAWING NUMBER	E-A-18		

FileJuicer
File Juicer