
FileJuicer

NORTH

NOTES

1. THE LIGHTING LAYOUT FOR MECHANICAL EQUIPMENT ROOM REPRESENTS THE NUMBER, APPROXIMATE LOCATION AND GENERAL ARRANGEMENT OF LIGHTING FIXTURES. MINOR DEVIATIONS IN LOCATION AND HEIGHTS MAY BE MADE TO AVOID SPECIFIC INTERFERENCES WITH MECHANICAL EQPT.
2. ALL MECHANICAL EQUIPMENT AND ELEVATOR MACHINE ROOM FLUORESCENT FIXTURES SHALL BE TYPE "FD" UNLESS OTHERWISE NOTED.
3. ALL FLUORESCENT WALL BRACKET FIXTURES SHALL BE TYPE "FH" (7'-0" AFF) UNLESS OTHERWISE NOTED.
4. FOR MAIN LTG. LAYOUT IN MECHANICAL EQUIPMENT ROOM SEE 41ST FL. PLAN DWG. # E-A-23.
5. ALL FLUORESCENT FIXTURES OCCURRING UNDER MECHANICAL DUCT WORK SHALL BE SUPPORTED FROM STRUCTURAL "U" CHANNELS, SUPPORTED OTHER THAN FROM THE DUCTWORK PROPER.
6. CONTRACTOR SHALL WIRE ALL FIXTURES AND RECEPTACLES IN ACCORDANCE WITH CIRCUIT NUMBERS INDICATED ON DWGS. IN MECH. EQPT. RM. ALL CONDUIT FOR LTG. FIXTURES SHALL BE RUN EXPOSED UNLESS OTHERWISE SHOWN.
7. MOUNT ALL TYPE "FD" FIXTURES IN MECH. EQPT. RM. WITH BOTTOM A MINIMUM OF 7' ABOVE FAN PLATFORMS UNLESS OTHERWISE NOTED.
8. PENDANT MOUNT TOP OF FIXTURE FLUSH WITH BOTTOM OF STRUCTURAL BEAMS.
9. ALL VERT. COND. OUTLETS, CONCEALED IN WALLS SHALL NOT BE CLOSER THAN 20" FROM FINISH DOOR OPENING.
10. WIREWAYS CONTAINING MORE THAN 30 CURRENT CARRING CONDUCTORS SHALL BE PROVIDED WITH 6" HIGH BARRIERS.
11. ALL CONNECTIONS TO ALL ELEVATOR EQUIPMENT SHALL BE MADE IN ACCORDANCE WITH APPROVED ELEVATOR SHOP DRAWINGS.
12. ELECTRICAL CONTRACTOR SHALL COORDINATE WITH THE ELEVATOR CONTRACTOR FOR POSSIBLE COMMON USE OF A WIRING TROUGH OVER THE ELEVATOR PANEL LINE-UPS IN LIEU OF USING SEPARATE CONDUIT RUNS TO THIS EQUIPMENT.
13. WIREWAY ELEVATIONS A.F.F. ARE APPROXIMATE, ELECTRICAL CONTRACTOR SHALL COORDINATE WITH OTHER TRADES TO AVOID SPECIFIC INTERFERENCES.
14. 2½" EMPTY CONDUITS FOR FUTURE MASTER TV ANTENNA SYSTEM.
15. REFER TO DWG. # E-x-11 FOR ELEVATOR CONTROL RISER DIAGRAM.

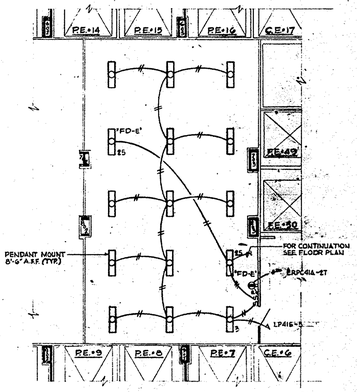

PART PLAN OF ELEVATOR MACHINE ROOM - BANK "D" LIGHTING

SCALE: 1/8"-1'-0"

1/8" = 1'-0" scale 0 5 10 15 20 feet

DRAWING Nº E-A-25 AND E-A-26 NOT PART OF THIS CONTRACT.

CONTRACT BID DRAWING date OCT. 16, 1967

NO.	DATE	BUL. NO.	BY	NO.	DATE	BUL. NO.	BY

REVISIONS REVISIONS

APPROVED

CHIEF, PLANNING DIVISION

DATE

THE WORLD TRADE CENTER

THE PORT OF NEW YORK AUTHORITY

MINORU YAMASAKI & ASSOCIATES
MINORU YAMASAKI, ARCHITECT

EMERY ROTH & SONS
RICHARD ROTH, ARCHITECT

WORTHINGTON, SKILLING, HELLE & JACKSON
STRUCTURAL ENGINEERS

JAROS, BAUM & BOLLES
MECHANICAL ENGINEERS

JOSEPH R. LORING & ASSOCIATES
ELECTRICAL ENGINEERS

THE PORT OF NEW YORK AUTHORITY
PAVING, UTILITIES, FOUNDATIONS

TITLE: LIGHTING AND POWER 42ND FLOOR - M.E.R.

DRAWN	R.F.H.	CHECKED	J.R.L.
SCALE	1/8"=1'-0"	DATE	OCT. 16, 1967
PROJECT NUMBER		SHEET	22 OF 114
DRAWING NUMBER	E-A-24		

File Juicer