

AE-144

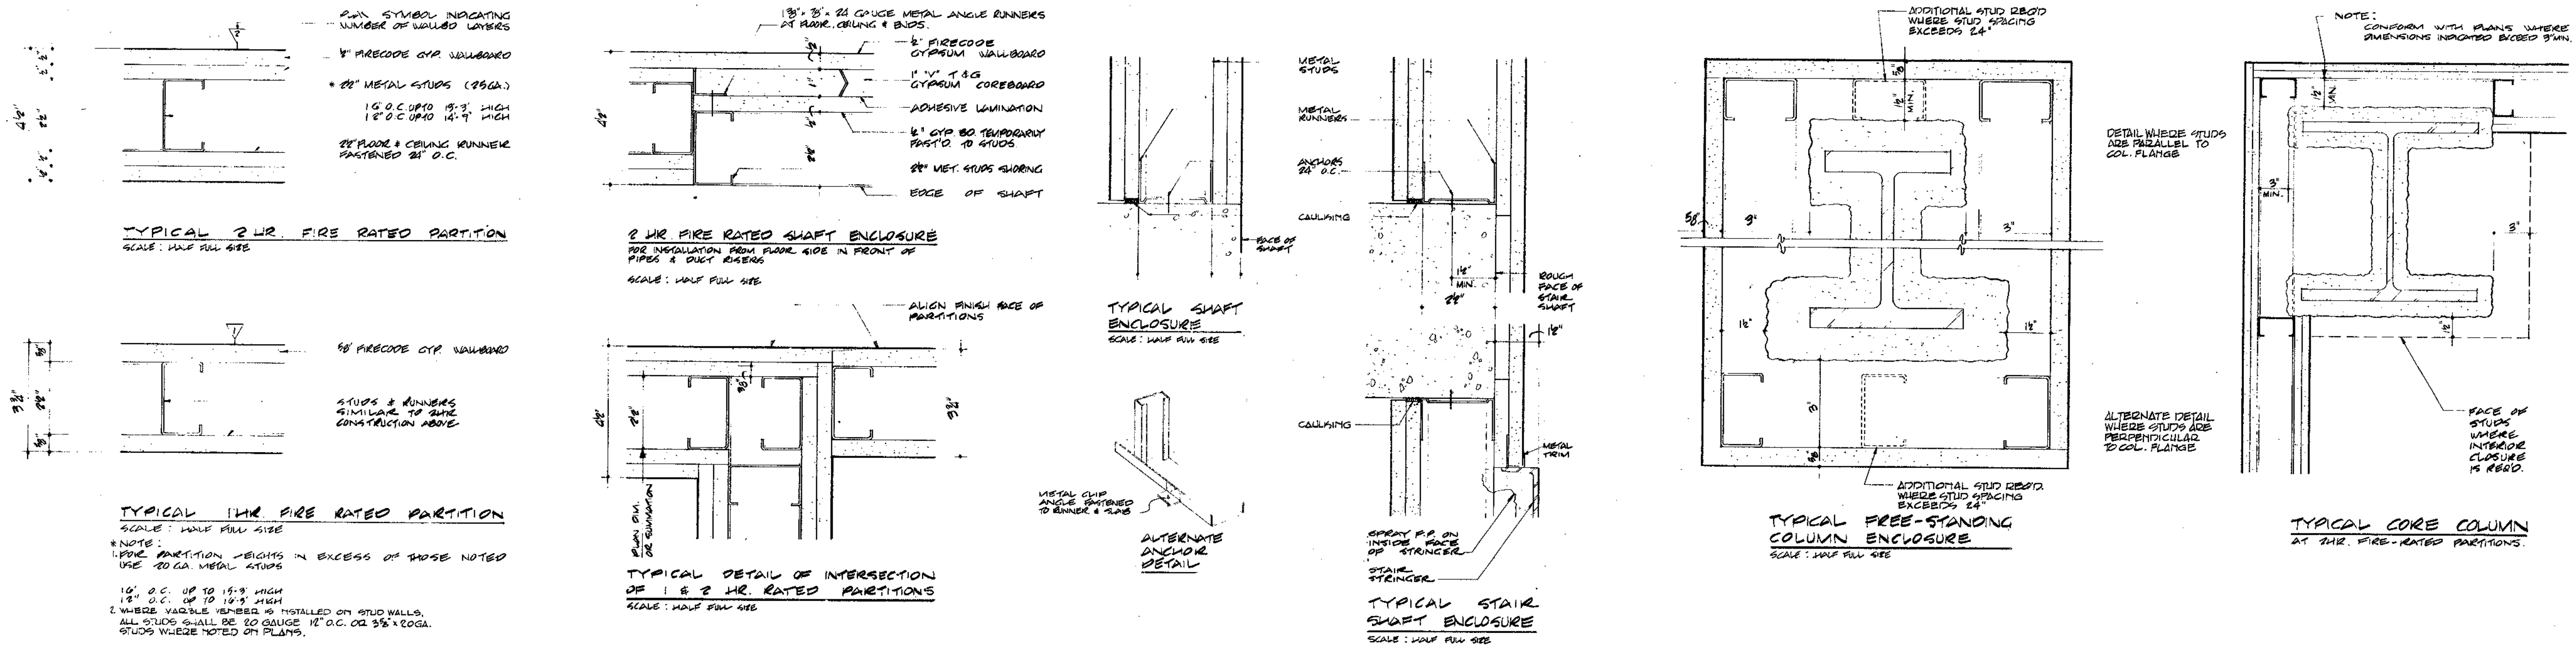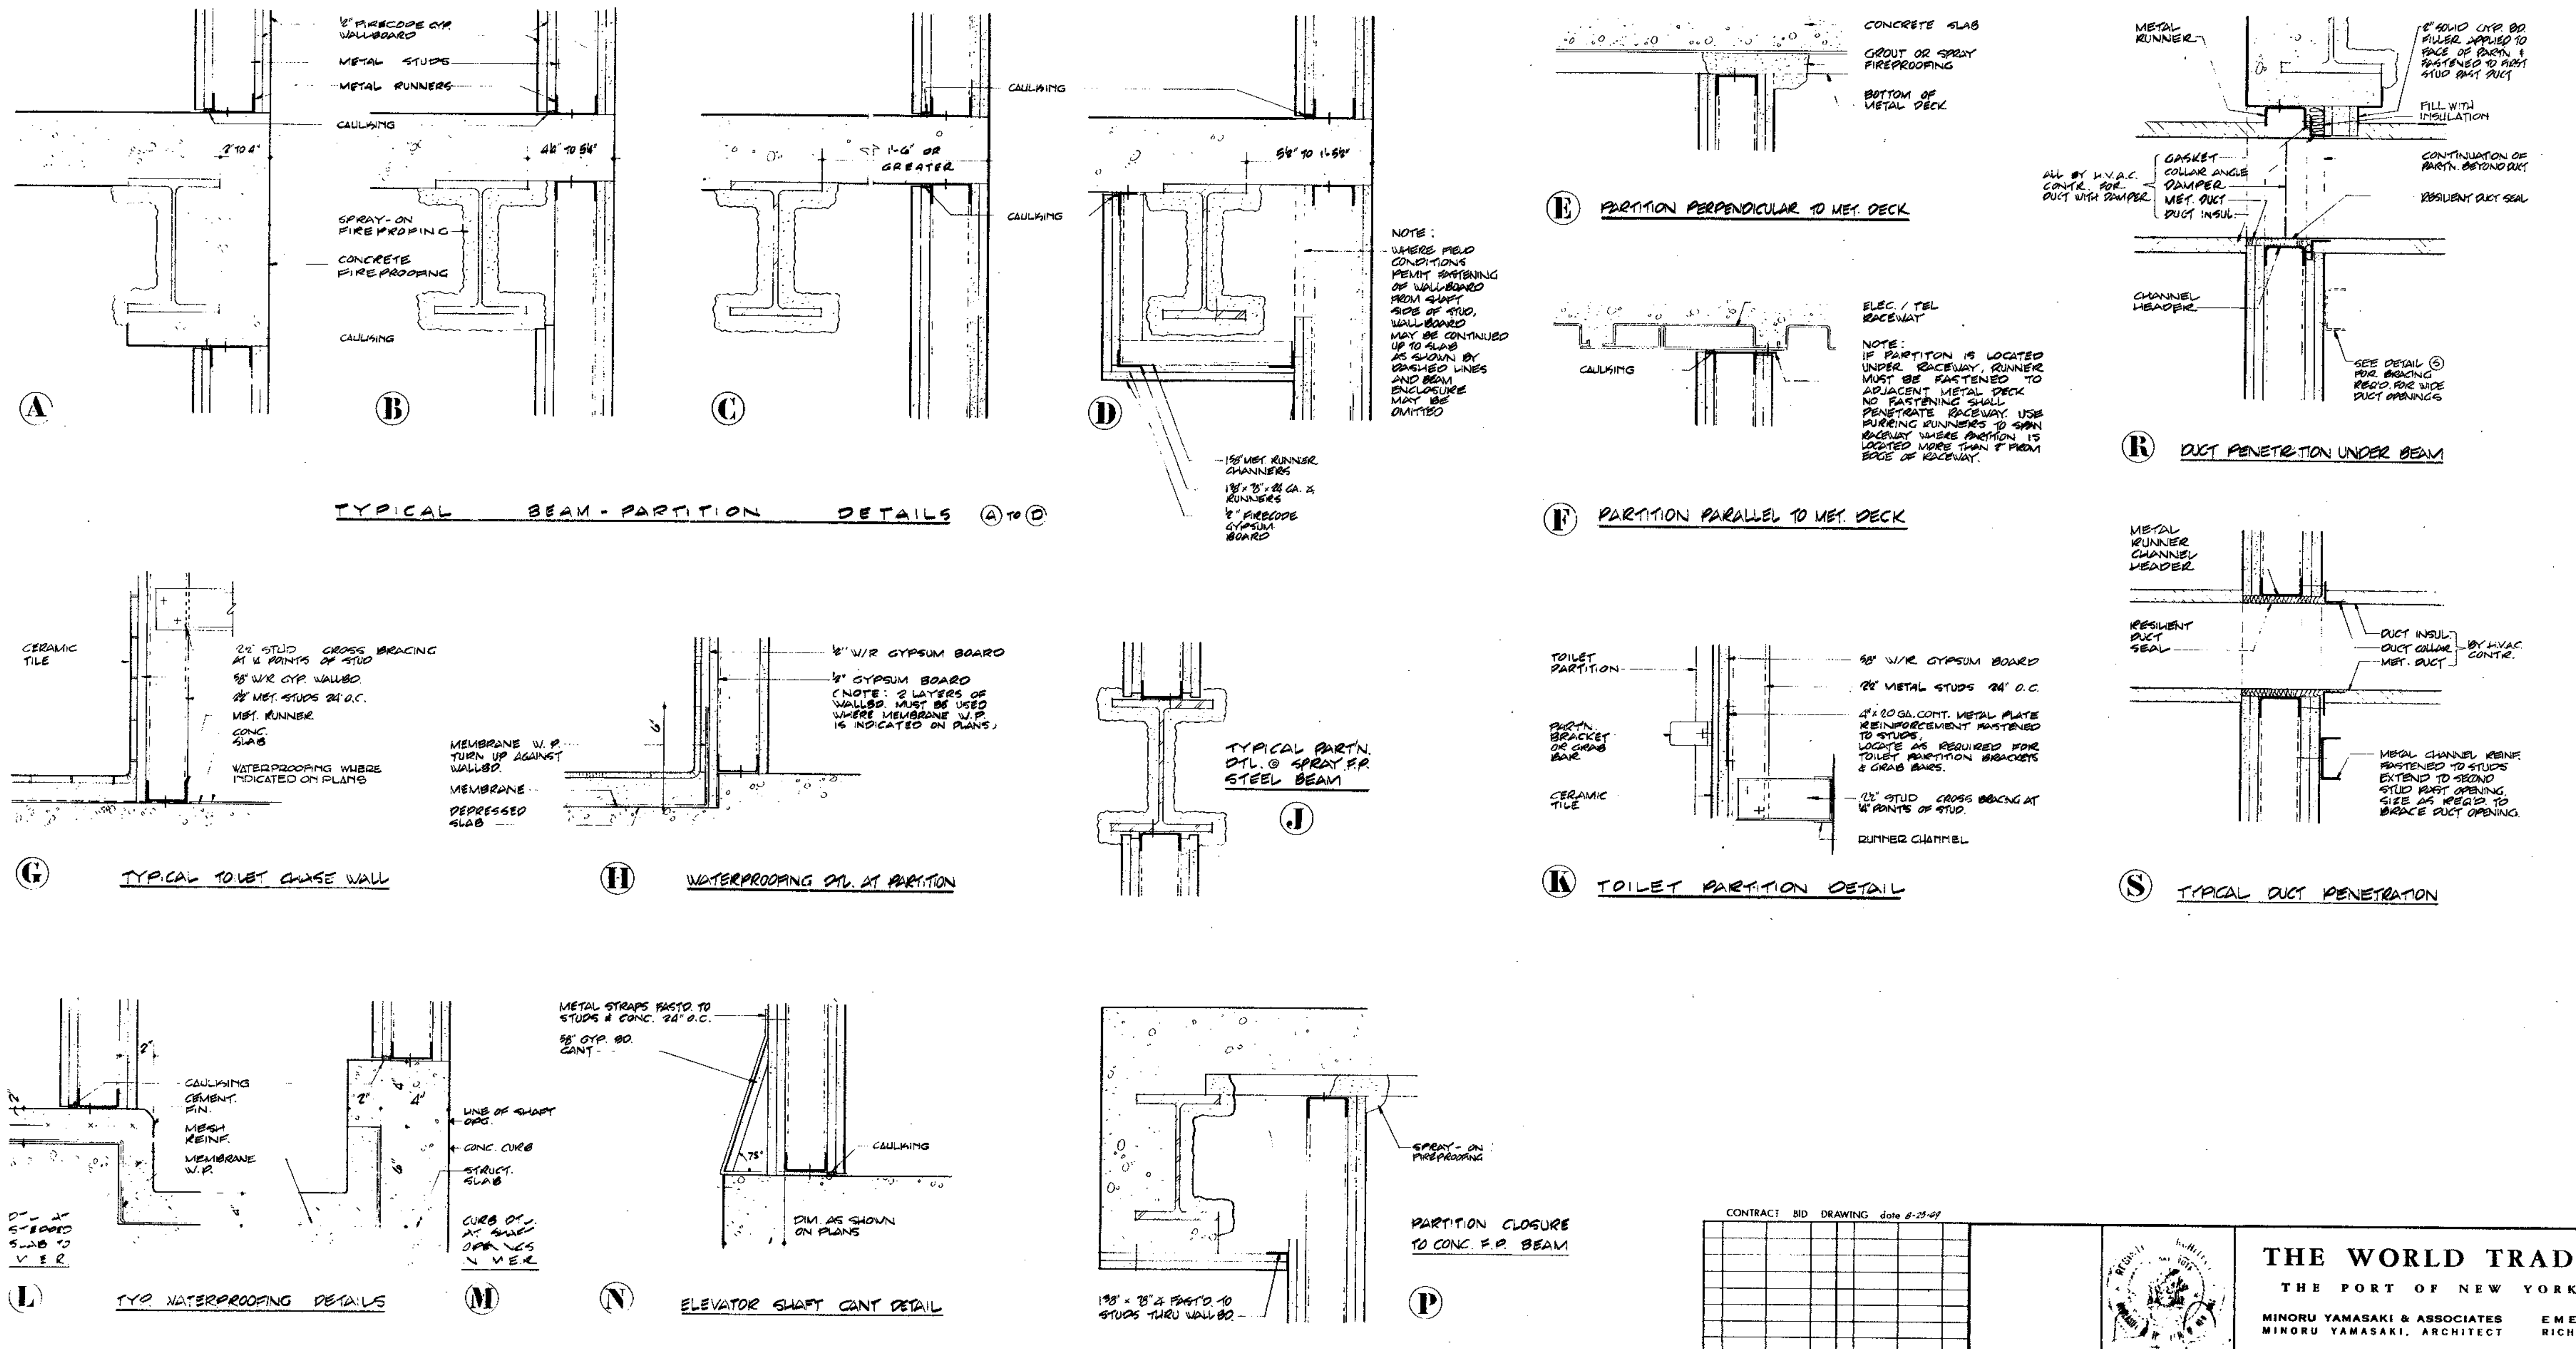


RECEIVED
DEC 2 6 1969
LESLIE E. ROBERTSON ASSOCIATES
211 EAST 46TH ST., N.Y.C. 10017

## METAL STUD PARTITION SYSTEM GENERAL NOTES:

1. NUMBER OF LAYERS OF GYPSUM WALLBD INDICATED BY SYMBOLS ON PLAN.
   - ▽1 — 1 LAYER OF 5/8" FIRECODE WALLBOARD
   - ▽2 — 2 LAYERS OF ½" FIRECODE WALLBOARD
   - ▽ — FINISH LAYER OF W/R WATER RESISTANT WALLBOARD
2. ON ALL CORE SHAFT, STAIR & CORRIDOR WALLS, METAL STUDS & WALLBOARD SHALL EXTEND FROM FLOOR TO UNDERSIDE OF SLAB OR BEAM ABOVE.
3. ON FURRED WALLS OR CHASE WALLS THAT DO NOT SERVE AS DEMISING WALLS TO SEPARATE SPACES, FINISH WALLBOARD MAY TERMINATE 6" ABOVE HUNG CEILING.
4. GYPSUM WALLBOARD TERMINATING AT SPRAY FIREPROOFING MUST FIT TO TIGHT TO F.P. CONFIGURATION WITH NO GAPS OR OPENINGS.
5. METAL CONTROL JOINTS SHALL BE INSTALLED AS REQD. WHERE GYP. BD. FINISH SPANS TWO DIFFERENT TYPES OF SUPPORT.
6. ALL CORNERS SHALL BE PROTECTED WITH METAL CORNER BEADS.
7. CHASE WALL PARTITIONS SHALL BE CROSS BRACED AT QUARTER POINTS OF STUDS.
8. WALLBOARD SHALL BE CAULKED AROUND PERIMETER OF PARTITIONS OF RETURN-AIR SHAFTS AND WHERE SOUNDPROOFING INSULATION IS INDICATED ON PLANS.
9. ALL STRUCTURAL MEMBERS PROJECTING INTO STAIR SHAFTS SHALL BE ENCLOSED WITH GYPSUM WALLBOARD FINISH.
10. GAUGES OF METAL STUDS, RUNNERS, ANGLES & TRIM SHALL BE IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS FOR LIMITING HEIGHTS & PRESSURE ON PARTITION.
11. WALLBOARD SHALL BUTT TIGHT AGAINST ALL BEAMS & PIPES PENETRATING PARTITION.
12. DOUBLE INTERLOCKING STUDS SHALL BE USED AT ALL DOOR OPENINGS, TRIMMED OPENINGS AND AT ENDS OF FREE STANDING PARTITIONS
13. WHERE PARTITION WITH ONE LAYER OF GYP. WALLBOARD ABUTS PARTITION WITH TWO LAYERS OF WALLBOARD, FINISH FACE OF WALLBOARD MUST ALIGN.
14. RUNNER TRACK FASTENED TO UNDERSIDE OF METAL DECK OR SPRAY FIREPROOFED STEEL MUST BE INSTALLED PRIOR TO APPLICATION OF SPRAY FIREPROOFING.
15. SEE SPECIAL DETAILS WHERE MARBLE VENEER IS APPLIED TO STUD PARTNS. ON DWG. "AE-47.

3"=1'-0" 0 1" 2" 3" 4" 5" 6" 9" 1'

CONTRACT BID DRAWING date 8-25-69

| NO. | DATE | BUL. NO. | BY | NO. | DATE | BUL. NO. | BY |
|---|---|---|---|---|---|---|---|
| | | | | A | 4-13-70 | E-7 | R.T.H. |
| | | | | 1 | 11-28-69 | E-1 | R.K.A. |
| REVISIONS | | | | REVISIONS | | | |

APPROVED

CHIEF, PLANNING DIVISION
DATE

# THE WORLD TRADE CENTER
THE PORT OF NEW YORK AUTHORITY

MINORU YAMASAKI & ASSOCIATES
MINORU YAMASAKI, ARCHITECT

EMERY ROTH & SONS
RICHARD ROTH, ARCHITECT

WORTHINGTON, SKILLING, HELLE & JACKSON
STRUCTURAL ENGINEERS

JAROS, BAUM & BOLLES
MECHANICAL ENGINEERS

JOSEPH R. LORING & ASSOCIATES
ELECTRICAL ENGINEERS

THE PORT OF NEW YORK AUTHORITY
PAVING UTILITIES, FOUNDATIONS

| | | | |
|---|---|---|---|
| TITLE | NORTHEAST PLAZA BUILDING<br>TYPICAL PARTITION DETAILS | | |
| DRAWN | R.K. | CHECKED | |
| SCALE | 3"=1'-0" & AS SHOWN | DATE | 7/28/69 |
| PROJECT NUMBER | | SHEET | OF |
| DRAWING NUMBER | A·E·144 | | |