
NORTH

NOTES

1. FOR GENERAL NOTES, KEY TO MATERIALS, SYMBOLS, ABBREVIATIONS, FINISH SCHEDULES, DOOR SCHEDULES AND SCHEDULES OF HARDWARE SEE DRAWINGS A-0.1 TO A-0.6
2. FOR COMPLETE ¼" SCALE FLOOR PLAN SEE DRAWING A-1.A-86
3. ALL ELEVATIONS GIVEN THUS ('101'-0") ARE IN RELATION TO FINISH FLOOR.
4. FOR MECHANICAL AND ELECTRICAL LAYOUTS, SEE EXPEDITING DRAWINGS PREPARED.
5. FOR TYPICAL STAIR DETAILS SEE DWGS. A-4.A-0.-204 & A-4.A-0.-205
6. ALL TRENCH HEADERS TO BE FURRED-DOWN AT UNDERSIDE OF SLAB FOR A WIDTH OF 6'-0" WITH A SPRAY-ON TYPE OF FIREPROOFING SEE ARCHITECTURAL SPECIFICATION FOR TYPE & ELECTRICAL ENGINEER'S & CONTRACTOR'S APPROVED SHOP DWGS. FOR LOCATION & EXTENT OF TRENCH HEADERS & FIREPROOFING.
7. FINISH FLOOR ELEVATION AND TOP OF SLAB ELEVATIONS ARE (99'-0") UNLESS OTHERWISE SHOWN OR NOTED
8. PLACE TOWEL DISPENSERS AT MEN AND WOMENS' TOILETS. ONE DISPENSER AT EACH LAVATORY ACCESS DOORS TO RECEPTACLES TO BE LOCATED IN ACCORDANCE WITH THE COVERING SEE TYPICAL TOILET DETAILS DWG. A-4.A-0.-214.
9. PROVIDE NO EXPOSED CEILINGS AND CLEATS FOR, EACH AT IN-CLOSETS, STAIR, ELEVATOR ETC.; BOTTOM ELEVATION OF ALL PIPING AND DUCTWORK, SHALL BE MAINTAINED AT 8'-3" ABOVE FINISHED FLOOR, TO PROVIDE FOR POSSIBLE CEILING INSTALLATION AND CLEARANCE OF ALL HEIGHT DOORS.
10. EXTENT OF PUBLIC CORRIDOR, CEILING IS INDICATED THUS: ———
11. CONTROL JOINTS: ARRANGED ON ALL SLABS PROJECTING OVER 50'-0" MINIMUM (ACTUAL) DIMENSION IN ELEVATION, JOINTS SHALL BE MINIMUM 1/8" WIDE AND SHALL BE SPACED AT 30'-0" MAXIMUM HORIZONTAL. SEE TYPICAL DETAILS.
12. FOR FIREPROOFING OF FIRE RESISTIVE COLUMNS AND TYPICAL PARTITION DETAILS SEE TYPICAL DETAILS DRAWINGS A-4.B.-206 TO A-4.B.-215

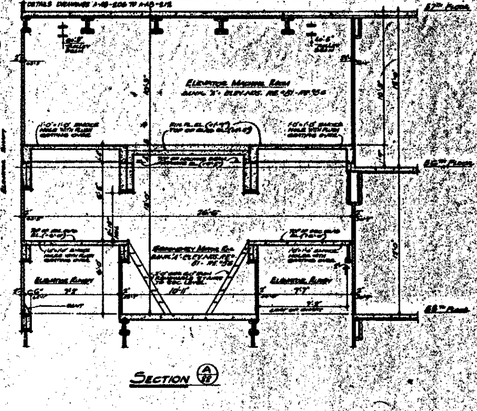

SECTION

BULLETINS NOT DATED ARE IN THE PROCESS OF COMPLETION

	CONTRACT	BID	DRAWING	date 4-1-68
			1-24-70	A-88
			1-30-70	A-87
			2-25-69	A-34
			2-25-69	A-26
			2-25-69	A-17
			9-25-69	A-25
6	8-69	A-84	11-1-68	A-15
5	11-6-70	A-88	8-1-68	A-10
4	2-3-70	A-87	2-27-68	A-8
3	10-30-70	A-87	5-15-68	A-11

No.	DATE	REVISIONS	BY
No.	DATE	REVISIONS	BY

REGISTERED ARCHITECT RICHARD ROTH NEW YORK

APPROVED

CHIEF, PLANNING DIVISION

DATE

THE WORLD TRADE CENTER

THE PORT OF NEW YORK AUTHORITY

MINORU YAMASAKI & ASSOCIATES MINORU YAMASAKI, ARCHITECT	EMERY ROTH & SONS RICHARD ROTH, ARCHITECT
WORTHINGTON, SKILLING, HELLE & JACKSON STRUCTURAL ENGINEERS	JAROS, BAUM & BOLLES MECHANICAL ENGINEERS
JOSEPH R. LORING & ASSOCIATES ELECTRICAL ENGINEERS	THE PORT OF NEW YORK AUTHORITY PAVING, STRUCTURE/FOUNDATIONS

TITLE: 56TH FLOOR CORE PLAN

DRAWN		CHECKED	
SCALE	1/16"=1'-0"	DATE	7-8-67
PROJECT NUMBER		SHEET	88
DRAWING NUMBER	A-A 88		

1/16"=1'-0" (0 2 4 6 8 10 12 SCALE IN FEET)