
NORTH

NOTES:

1. FOR ARCHITECTURAL NOTES, KEY TO MATERIALS, ABBREVIATIONS, SYMBOLS, DOOR SCHEDULE & LEGEND OF DRAWINGS, SEE DWG. # A-F-1 TO A-F-5.
2. FOR COMPLETE 1/8" SCALE CORE PLAN SEE DWG. # A-F-27.
3. ALL ELEVATIONS, SHOWN THUS (7.00'), ARE TAKEN IN RELATION TO FINISH FLOOR ELEVATION OF LOBBY AT 7.00'.
4. FOR ALL MECHANICAL AND ELECTRICAL LAYOUTS, SEE RESPECTIVE ENGINEER DRAWINGS.
5. FOR TYPICAL STAIR DETAILS AND SECTION SEE DWG. # S-F-100.
6. FINISH FLOOR ELEVATION AND TOP OF SLAB ELEVATION ARE (0'-0") UNLESS OTHERWISE SHOWN OR NOTED.
7. GRATES ARE BASED ON ALL AREAS PROJECTIONS OVER 2'-0" ACTUAL DIMENSION IN ELEVATOR SHAFT AND SHALL BE MINIMUM 75% FREE AREA. SEE TYPICAL DETAILS ON DWG. # S-F-104.
8. 5 1/2" SLAB DIVISION OF VAULT SPACE TO BE DETERMINED BY CONSTRUCTION SEQUENCE.
9. PROVIDE DOOR CLOSERS TO OPERATORS CONTROL VALVES IN MECHANICAL ROOMS. SEE MECHANICAL DWGS. FOR LOCATIONS.
10. ROOF OF LOBBY WALLS WERE ALL CEILINGS IN MASONRY WALL.
11. 2 SKYLIGHT DUCTS BETWEEN SKYLIGHTS WITH 2 GENERAL LAYERS OF METAL LATH, 1" VERMICULITE PLASTER HARD TO DECK, PAN FILLED OF NEOPRENE SEE MECHANICAL DWGS.

N. 4638.78 W. 9236.90

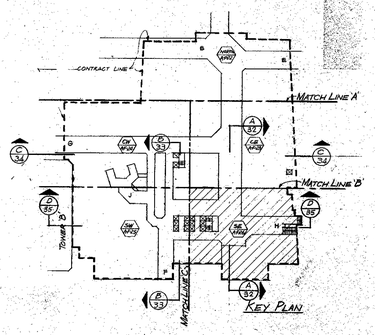

CONTRACT MD DRAWING date 11-21-78

NO.	DATE	SUB. NO.	BY
20	9-19-75	F-22	J.K.
21	10-17-75	F-13	L.U.
22	10-29-76	ADD.F-13	L.U.
23	1-19-76	ADD.F	L.U.
24	11-17-78	ADD.F	J.K.

REVISIONS

APPROVED

CHIEF, PLANNING DIVISION

DATE

1/8"-1'-0" 0 4' 8' 16' 24'

THE WORLD TRADE CENTER

THE PORT AUTHORITY OF NEW YORK AND NEW JERSEY

MINORU YAMASAKI & ASSOCIATES
MINORU YAMASAKI, ARCHITECT

SKILLING, HELLE, CHRISTIANSEN, ROBERTSON
STRUCTURAL ENGINEERS

EMERY, ROTH & SONS
RICHARD ROTH, ARCHITECT

THE PORT AUTHORITY OF NEW YORK AND NEW JERSEY
MECHANICAL, ELECTRICAL, PAVING, UTILITIES, FOUNDATIONS

TITLE: SOUTHEAST PLAZA BUILDING
1ST FLOOR - 30'-0" LEVEL
SOUTHEAST

DRAWN		CHECKED	
SCALE	1/8"-1'-0"	DATE	11-15-78
PROJECT NUMBER		SHEET	OF
DRAWING NUMBER	A-F-26		