


No.	REVISIONS	Date
	SUBMITTED TO P.A. FOR REVIEW	10/15/84
	SUBMITTED TO P.A. FOR REVIEW	11/14/84

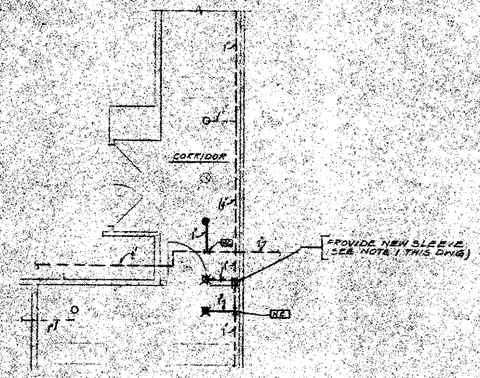


PART CONSTRUCTION /DEMOLITION PLAN-
8-TH FLOOR AREA "E"




PART CONSTRUCTION / DEMOLITION PLAN
8-TH FLOOR AREA "J"

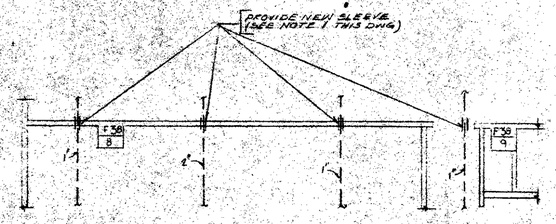


CONSTRUCTION /DEMOLITION PLAN
PART 8-TH FLOOR AREA "E"

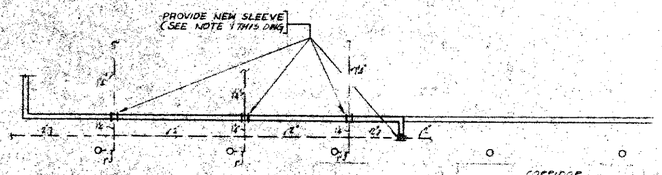


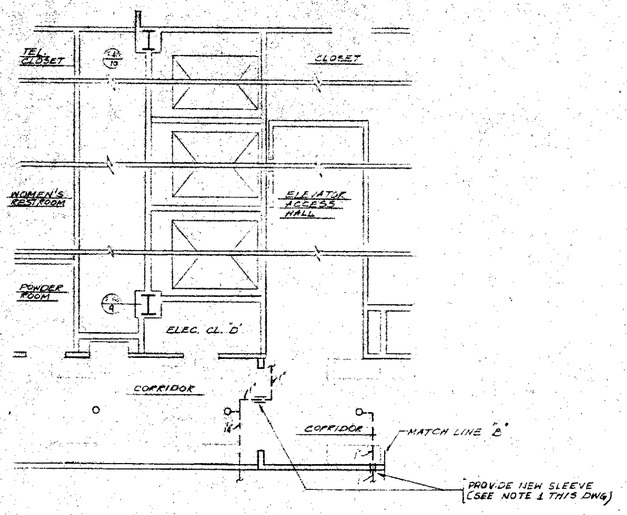

PART CONSTRUCTION /DEMOLITION PLAN
7-TH FLOOR AREA "F"

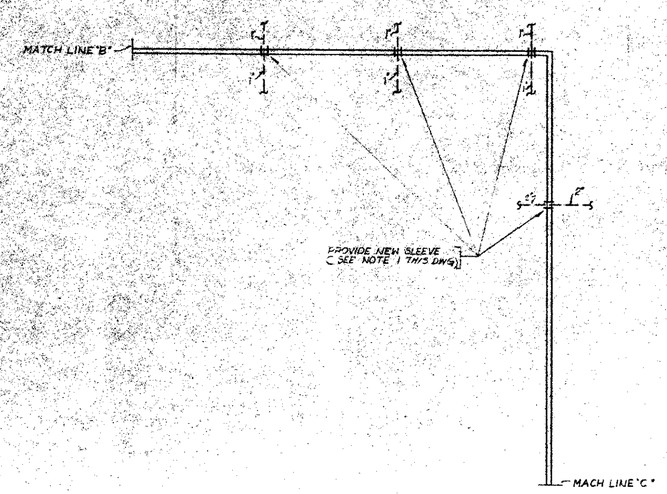

PART CONSTRUCTION /DEMOLITION PLAN
7TH FLOOR AREA "F"

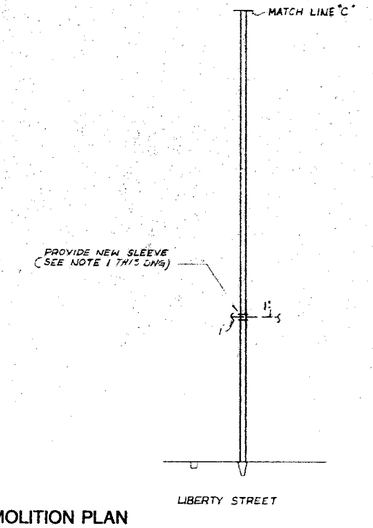

NOTE 1

PROVIDE NEW SLEEVES FOR EXISTING SPR PIPES PENETRATING 2-HR RATED UPGRADING OF NEW PARTITIONS. CONTRACTOR TO SURVEY ALL SUCH CONDITIONS BEFORE SUBMITTING BIDS. (TYPICAL FOR ALL UPGRADING OF NEW PARTITIONS)

NOTES:

1. FOR SPRINKLER LEGEND REFER TO DWG 1-SPR-1 (PHASE 1)
2. FOR EXACT LOCATION OF THE AREAS INDICATED ON THE DWG. SEE ARCH. PLAN L-2 (7TH. FLOOR KEY PLAN) &L-1 (8TH. FLOOR KEY PLAN)

COMMODITIES EXCHANGE CENTER, INC.
FOUR WORLD TRADE CENTER
NEW YORK, NEW YORK 10048

EGRESS UPGRADE
PHASE 1
AREA "E", "J", "F"

PART PLANS
7-TH & 8-TH FLRS
SPRINKLER

MEYER STRONG & JONES, PC
MECHANICAL & ELECTRICAL ENGINEERS
230 PARK AVE NEW YORK N.Y. 10169

SONSIDORE BRIGNATI & MAZZOTTA, P.C. ARCHITECTS
370 SEVENTH AVENUE NEW YORK, NEW YORK 10001 (212) 868-9200

project 1830
scale 1/4"-1'-0"
date 6/8/84
dwg no 1-SPR-4