

WORTHINGTON, SKILLING, HELLE & JACKSON — Civil & Structural Engineers

PROJECT: THE WORLD TRADE CENTER | TITLE: EXT. WALL TO EL. 363'-SPANDREL SPLICE DETAIL A | DATE: 2-17-67

REVISIONS
3-15-67
1-26-68

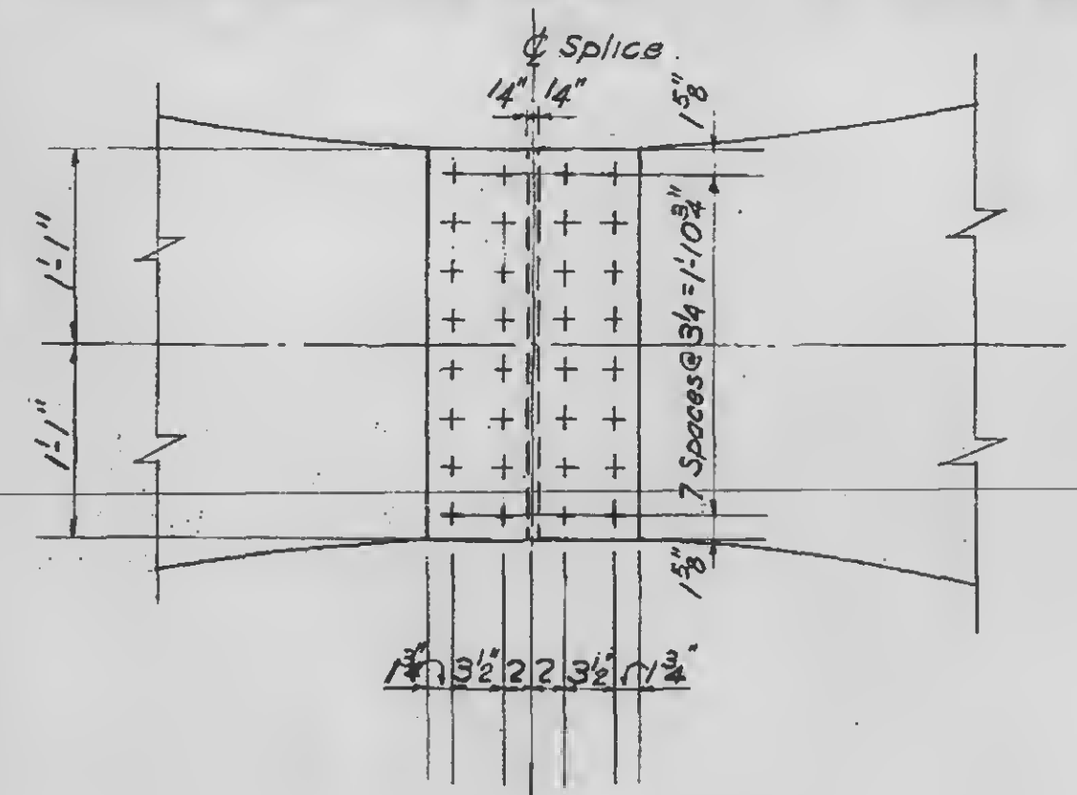

Splice Detail	Bolts
A11	32-¼" A490
A12	32-⅛" A490
A13	32-1" A490

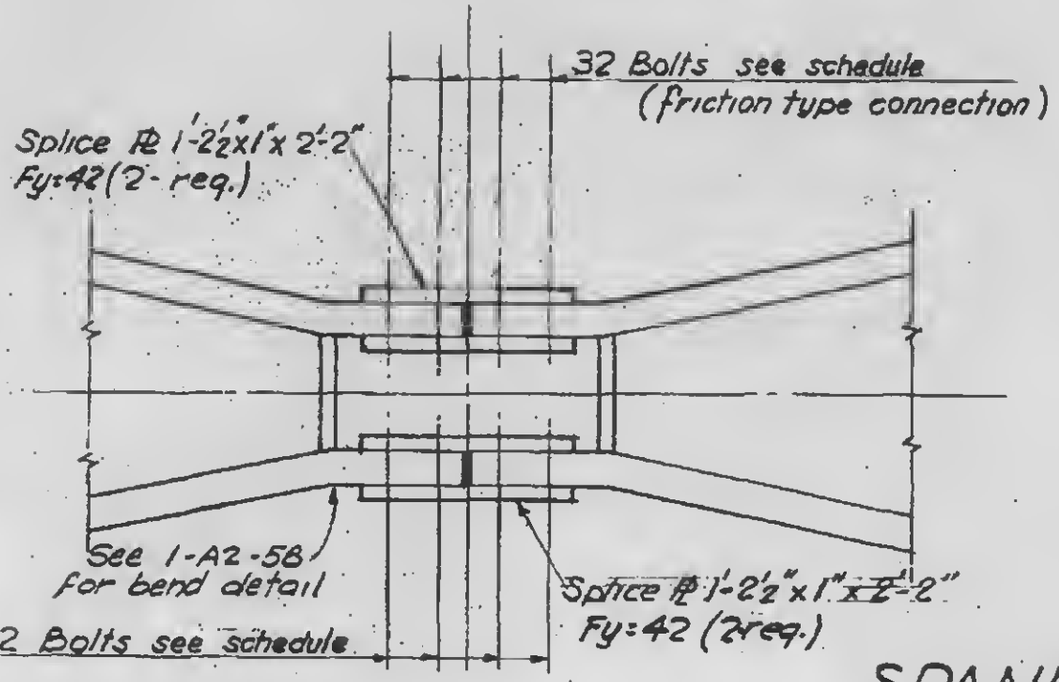

Note
Bolt holes in spandrel plates to be 3/16" larger in diameter than the schedule bolt. Holes in splice plates 1/16" larger than the schedule bolt.

LICENSED PROFESSIONAL ENGINEER — LESLIE E. ROBERTSON — N. 34360 — STATE OF NEW YORK

SPANDREL SPLICE DETAILS A11, A12 & A13

1-A2-38