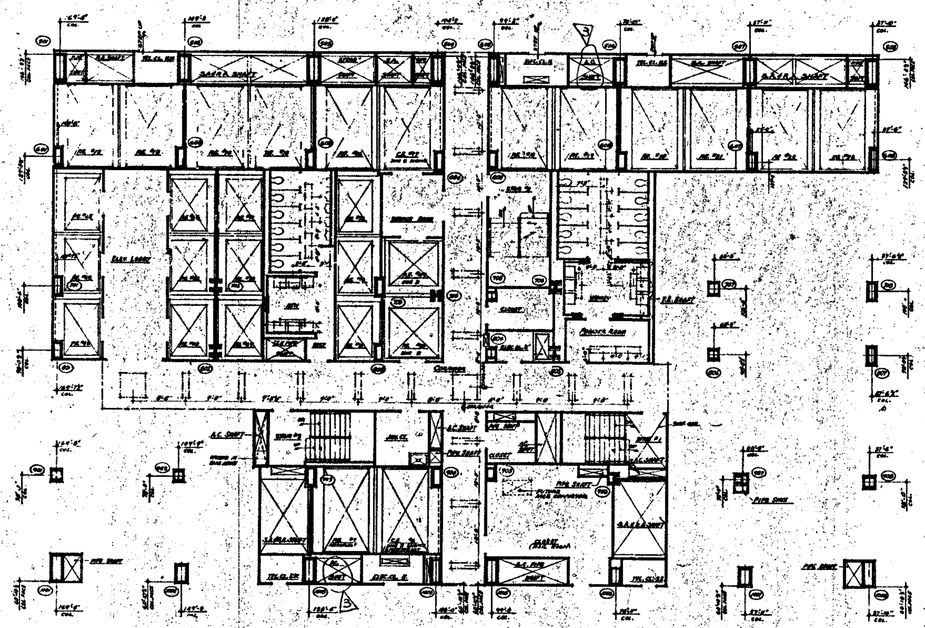


NOTES

1. FOR GENERAL NOTES, KEY TO MATERIALS, SYMBOLS ABBREVIATIONS, FINISH SCHEDULES, DOOR SCHEDULES AND SCHEDULES SEE DRAWINGS A-1-1 TO A-2-6
2. FOR COMPLETE DIMENSIONS AND NOTES OF CORE AREAS SEE 1/8" SCALE CORE DRAWINGS A-4-1 ETC.
3. ALL ELEVATIONS SHOWN THUS 15'-0" ARE IN RELATION TO PROJECT DATUM.
4. FOR MECHANICAL AND ELECTRICAL LAYOUTS SEE RESPECTIVE ENGINEERS DRAWINGS.
5. ALL TRENCH HEADERS TO BE RECESSED 4" MAXIMUM IF SLAB FOR A WIDTH OF 2'-0" WITH A DRAWN TYPE FACEPLATE. SEE ARCHITECTURAL, CONSTRUCTION AND ELECTRICAL ENGINEERS AND CONTRACTORS APPROVED SLAB DRAWINGS FOR DIMENSIONS AND DETAILS OF RECESS AND FACEPLATE.
6. CORRIDOR AND TOILET LIGHTING LAYOUT AT SLAB=, SEE ALL OTHER LIGHTING AND ELECTRICAL DRAWINGS AND ARCHITECTURAL DETAILS.
7. FINISH FLOOR ELEVATION AND TOP OF SLAB ELEVATIONS ARE (79'-0") UNLESS OTHERWISE SHOWN AS NOTED.
8. AREAS TO HAVE PUBLIC CEILINGS ARE SHOWN THUS: [illegible] AT 9'-0" A.F.F. AT 8'-6" ABOVE FINISH FLOOR AT SLAB SECTION ELEVATION OF ALL FIXTURES AND DEVICES SHALL BE MARKED AT 8'-6" ABOVE FINISHED FLOOR TO PROVIDE FOR FUTURE CEILING INSTALLATION AND CLEARANCE OF FULL 8'-0" DOORS.
9. EXTENT OF PUBLIC CORRIDOR CEILING IS INDICATED THUS: [illegible]

BULLETINS NOT DATED ARE IN THE PROCESS OF COMPLETION

CONTRACT NO. DRAWING date 4-1-68

NO.	DATE	SUBJ. DESC.	BY
1	6-18-70	A-164	DBL
2	7-30-70	A-122	AB
3	5-26-69	A-17	DG

REVISIONS

REVISIONS

APPROVED

CHIEF, PLANNING DIVISION

DATE

REGISTERED ARCHITECT

THE WORLD TRADE CENTER

THE PORT OF NEW YORK AUTHORITY

MINORU YAMASAKI & ASSOCIATES	EMERY ROTH & SONS
MINORU YAMASAKI, ARCHITECT	RICHARD ROTH, ARCHITECT
SKILMAN, BALDINI, PELLI & JACKSON	JAROS, BAUM & BOLLES
STRUCTURAL ENGINEERS	MECHANICAL ENGINEERS
JOSEPH R. LORING & ASSOCIATES	THE PORT OF NEW YORK AUTHORITY
ELECTRICAL ENGINEERS	PAVING, UTILITIES, FOUNDATIONS

TITLE: 64TH FLOOR PLAN

DESIGNED		CHECKED	
SCALE	1/8"	DATE	12/21/67
DRAWN		APPROVED	

DRAWING NO. A-A-100