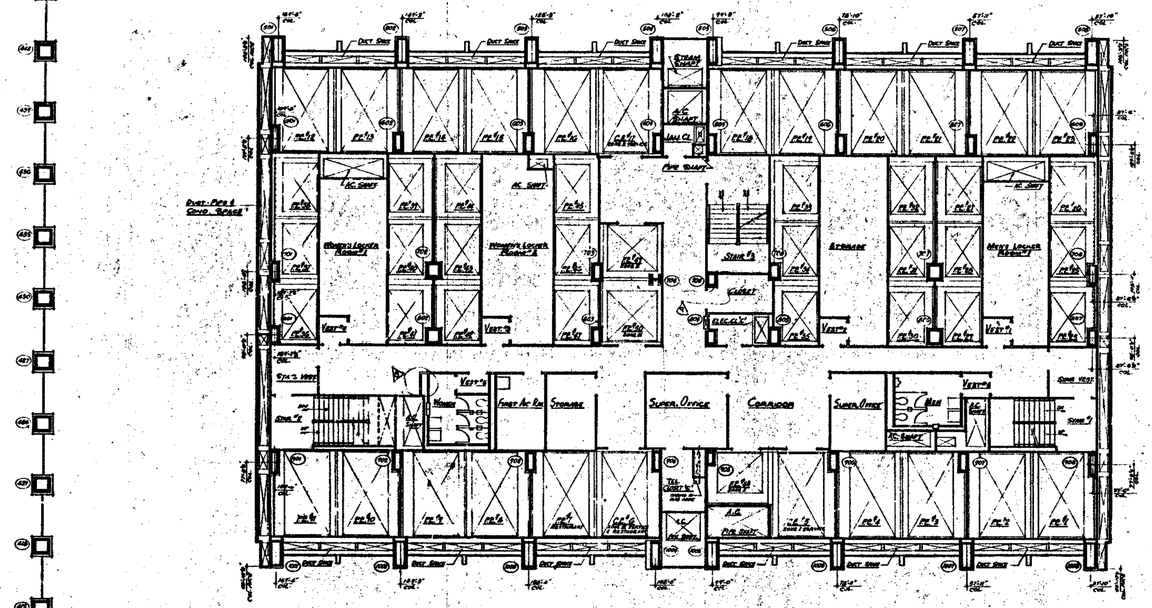


UPPER PART OF LOBBY

NOTE:
FOR LOWER PART OF LOBBY SEE DRAWING A-2.1

NORTH

NOTES

1. FOR GENERAL NOTES, KEY TO MATERIALS, SYMBOLS, ABBREVIATIONS, FINISH SCHEDULES, DOOR SCHEDULES AND SCHEDULE OF DRAWINGS SEE DRAWINGS A-0.1 TO A-0.6.
2. FOR COMPLETE DIMENSIONS AND NOTES IN CORE AREA SEE 'A' SERIES CORE DRAWING A-A-1.05.
3. ALL ELEVATIONS GIVEN THUS (10'-0") ARE IN RELATION TO FINISH FLOOR.
4. FOR MECHANICAL AND ELECTRICAL LAYOUTS SEE RESPECTIVE ENGINEERS DRAWINGS.
5. FINISH FLOOR ELEVATION AND TOP OF SLAB ELEVATIONS ARE (10'-0") UNLESS OTHERWISE SHOWN OR NOTED.
6. WHERE NO SUSPENDED CEILING IS CALLED FOR, SUCH AS IN CLOSETS STAIR PASSAGES ETC., BOTTOM ELEVATION OF ALL PIPING AND DUCTWORK SHALL BE MAINTAINED AT 8'-6" ABOVE FINISHED FLOOR, TO PROVIDE FOR FUTURE CEILING INSTALLATION AND CLEARANCE OF FULL HEIGHT DOORS.

BULLETINS NOT DATED ARE IN THE PROCESS OF COMPLETION

CONTRACT 100 DRAWING Date 4-9-68

NO.	DATE	DESCRIPTION	BY
1	6-18-71	A-106	D.G.
2	5-13-70	A-78	A.H.
3	1-30-70	A-88	L.L.
4	1-30-70	A-87	L.L.
5	2-23-69	A-33	L.L.
6	9-29-69	A-25	L.L.H.
7	6-11-69	A-98	L.H.L.
8	4-17-68	A-9	D.G.
9	5-15-68		L.H.L.

REVISIONS

APPROVED

CHIEF, PLANNING DIVISION

DATE

THE WORLD TRADE CENTER
THE PORT OF NEW YORK AUTHORITY

MINORU YAMASAKI & ASSOCIATES — MINORU YAMASAKI, ARCHITECT
EMERY ROTH & SONS — RICHARD ROTH, ARCHITECT
WORTHINGTON, SKILLING, HELLE & JACKSON — STRUCTURAL ENGINEERS
JAROS, BAUM & BOLLES — MECHANICAL ENGINEERS
JOSEPH R. LORING & ASSOCIATES — ELECTRICAL ENGINEERS
THE PORT OF NEW YORK AUTHORITY — PAVING, UTILITIES, FOUNDATIONS

TITLE: 3rd FLOOR PLAN

DRAWN | CHECKED
SCALE 1/16" | DATE 7-28-67
PROJECT NUMBER | SHEET OF

DRAWING NUMBER: A-A-23