

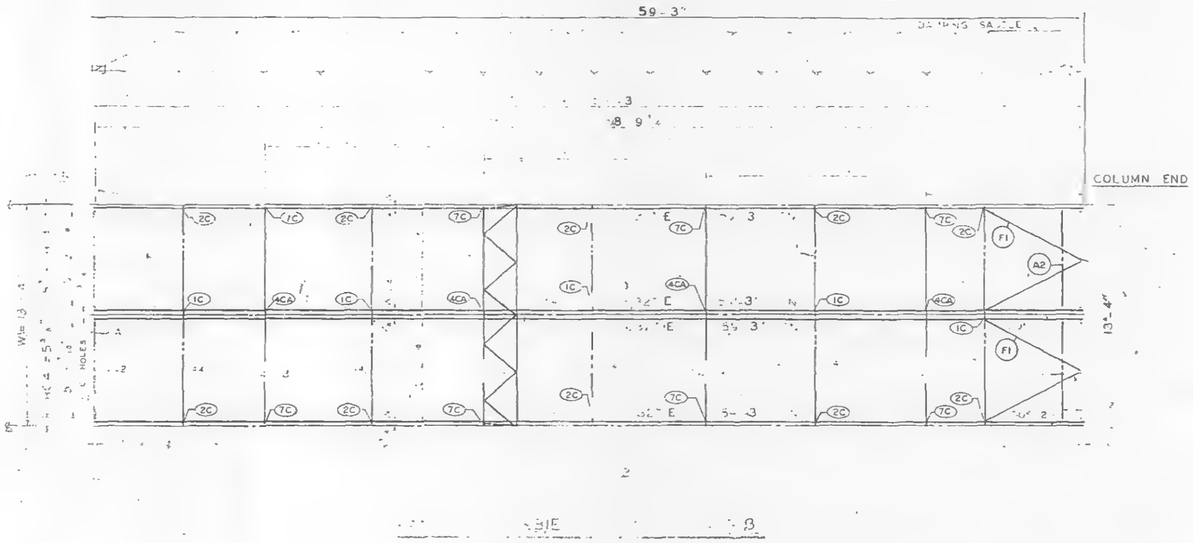


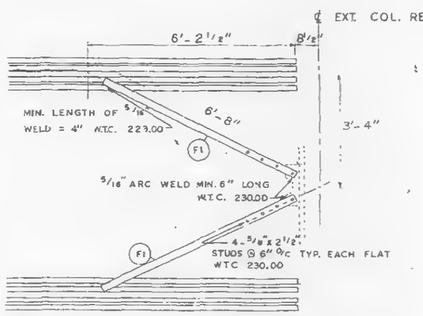

TYPICAL PLAN OF TOP CHORD COLUMN END DIAGONAL TRUSS BRACES PLACED OVER DECK BY W.T.C. 223.00



CLIP ANGLE LOCATION FOR DIAGONAL FLATS 4" ABOVE COLUMN CLIPS FOR TRUSS BEARING.


PATCH PLATES


	PP1	12		ST 400
	PP2	12		ST 400

COVER PLATES

		18	2" x 1 1/2" x 1'-6"	ST 400
		2	8	ST 400
			6"	
			6"	
	C31	4	1'-1"	ST 400

CONNECTION PLATES	P1	5	7 1/2" x 7/8" x 6 1/2"	ST 400
	P2	4	4 1/2" x .38" x 0'-9"	ST 400
	P3	4	4 1/2" x .38" x 1'-0"	ST 400

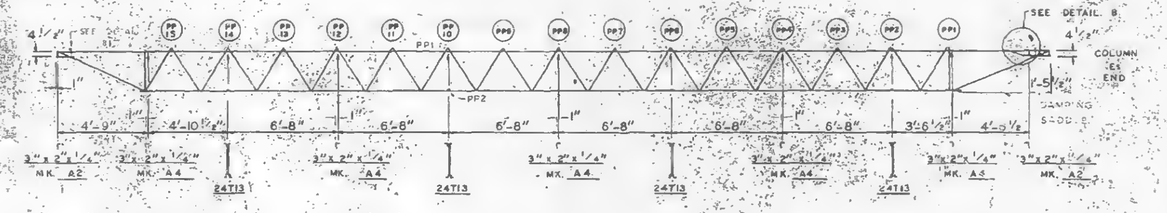


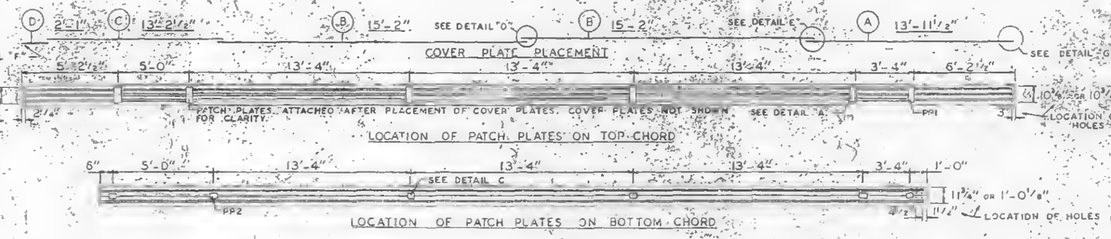


NUMBERS AND LETTERS IN ELLIPSES, (1C) INDICATE CONNECTION DETAILS SHOWN ON SHEET CD 201 OR CD 202.



DETAIL "J"
END SUPPORT ANGLE ATTACHMENT



SECTION A-A
END SUPPORT ANGLE

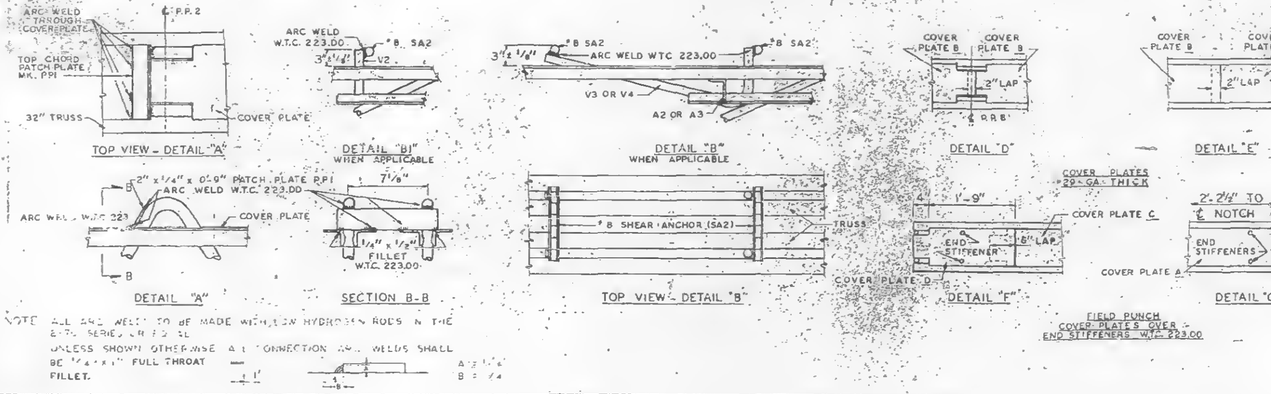

NOTE ALL ARC WELDS TO BE MADE WITH LOW HYDROGEN RODS IN THE E-70 SERIES OR E-80 SERIES.
UNLESS SHOWN OTHERWISE ALL CONNECTION ARC WELDS SHALL BE 1/4" x 1" FULL THROAT FILLET.

NO.	DATE	REVISION	BY
1	7-15-68	GENERAL	TMC

BLDG A FLOORS 10-11 (NORTH & SOUTH)

JACOBS STEEL CO.

8/16/68