
NORTH

NOTES

1. FOR GENERAL NOTES, KEY TO MATERIALS, SYMBOLS, ABBREVIATIONS, FINISH SCHEDULES, DOOR SCHEDULES AND SCHEDULES OF HARDWARE SEE DRAWINGS A-0.1 TO A-0.6
2. FOR COMPLETE ⅛" SCALE FLOOR PLAN SEE DRAWING A-1.A-86
3. ALL ELEVATIONS GIVEN THUS ('101'-0") ARE IN RELATION TO FINISH FLOOR.
4. FOR MECHANICAL AND ELECTRICAL LAYOUTS, SEE EXPEDITING DRAWINGS AS PREPARED.
5. FOR TYPICAL STAIR DETAILS SEE DWGS. M.A.A.D.-204 & A.A.F.-2.02
6. ALL TRENCH HEADERS TO BE FIRE-PROOFED AT UNDERSIDE OF SLAB FOR A WIDTH OF 4'-0" WITH A SPRAY-ON TYPE OF FIRE-PROOFING SEE ARCHITECTURAL SPECIFICATION FOR TYPE & ELECTRICAL ENGINEER'S & CONTRACTOR'S APPROVED SHOP DWGS. FOR LOCATION & EXTENT OF TRENCH HEADERS & FIRE-PROOFING.
7. FINISH FLOOR ELEVATION AND TOP OF SLAB ELEVATIONS ARE (99-1) UNLESS OTHERWISE SHOWN OR NOTED
8. PLUMB. TOUR DEPENDENT AT MEN AND WOMENS TOILETS ONE DISPENSER AT EACH LAVATORY ACCESS DOORS TO SOAP DISPENSER VALVES TO BE LOCATED IN ACCORDANCE WITH THE COVERING SEE TYPICAL TOILET DETAILS DWG. P.A.-AB-2.14.
9. PROVIDE NO EXPOSED CEILINGS ARE CALLED FOR, SUCH AS IN CLOSETS, STAIR, ELEVATOR ETC., BOTTOM ELEVATION OF ALL PIPING AND DUCTWORK, SHALL BE MAINTAINED AT 91-1 ABOVE FINISHED FLOOR, TO PROVIDE FOR POSSIBLE CEILING INSTALLATION AND CLEARANCE OF ALL HEIGHT BARS.
10. EXTENT OF PUBLIC CORRIDOR, CEILING IS INDICATED THUS: ———
11. GRANITE BASE ASSEMBLIES ON ALL BEAM PROJECTIONS OVER 3½" MINIMUM (4" ACTUAL) PROJECTION IN ELEVATION, SHAFTS AND SHALL BE MINIMUM 78" PLAN HORIZONTAL. SEE TYPICAL DETAILS
12. FOR PERFORMING OF FIRE RETARDING COLORS AND TYPICAL PARTITION DETAILS SEE TYPICAL DETAILS DRAWINGS A-AB-2.08 TO A-AB-2.15

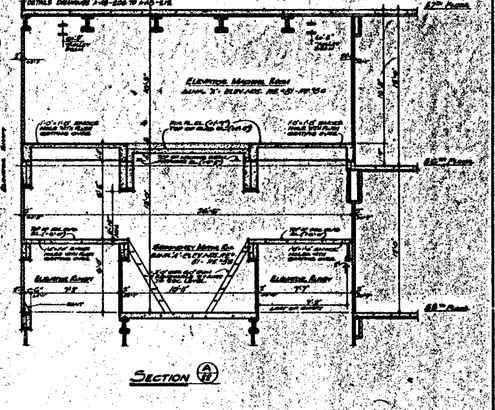

SECTION

BULLETINS NOT DATED ARE IN THE PROCESS OF COMPLETION

	CONTRACT	BID	DRAWING	date 4-1-68
			1-24-70 A-38	LJ
			1-30-70 A-37	LJ
			5-25-69 A-34	DL
			5-25-69 A-36	DL
			5-25-69 A-17	DL
			5-25-69 A-35	DL
6-8-71	A-84	DBL	11-1-68 A-15	MR
11-5-70	A-04	LJ	8-1-68 A-10	DBL
2-3-71	A-78	MR	5-27-68 A-8	DB
10-30-70	A-81	EZ	5-15-68	EZ

No.	DATE	By	No.	DATE	By
REVISIONS					

APPROVED

CHIEF, PLANNING DIVISION

DATE

REGISTERED ARCHITECT RICHARD ROTH IN TURN

THE WORLD TRADE CENTER

THE PORT OF NEW YORK AUTHORITY

MINORU YAMASAKI & ASSOCIATES MINORU YAMASAKI, ARCHITECT	EMERY ROTH & SONS RICHARD ROTH, ARCHITECT
WORTHINGTON, SKILLING, HELLE & JACKSON STRUCTURAL ENGINEERS	JAROS, BAUM & BOLLES MECHANICAL ENGINEERS
JOSEPH P. LORING & ASSOCIATES ELECTRICAL ENGINEERS	THE PORT OF NEW YORK AUTHORITY PAVING, SPECIFIER/FOUNDATIONS

½"-1'-0"

TITLE: 56TH FLOOR CORE PLAN

DRAWN		CHECKED	
SCALE	½"=1'-0"	DATE	7-8-67
PROJECT NUMBER		SHEET	88
DRAWING NUMBER	A·A 88		