REVISIONS

SKILLING, HELLE, CHRISTIANSEN, ROBERTSON
CONSULTING STRUCTURAL AND CIVIL ENGINEERS

DRAWING NO 13-K19 20.1


PROJECT NTC-1978 HOTEL - SUPPORT REV. | PROJECT NO 701.283 | BY WAB

ELEVATOR BUFFER BEAMS

DATE 5-31-79

PLAN EL. 294


PART SK-87

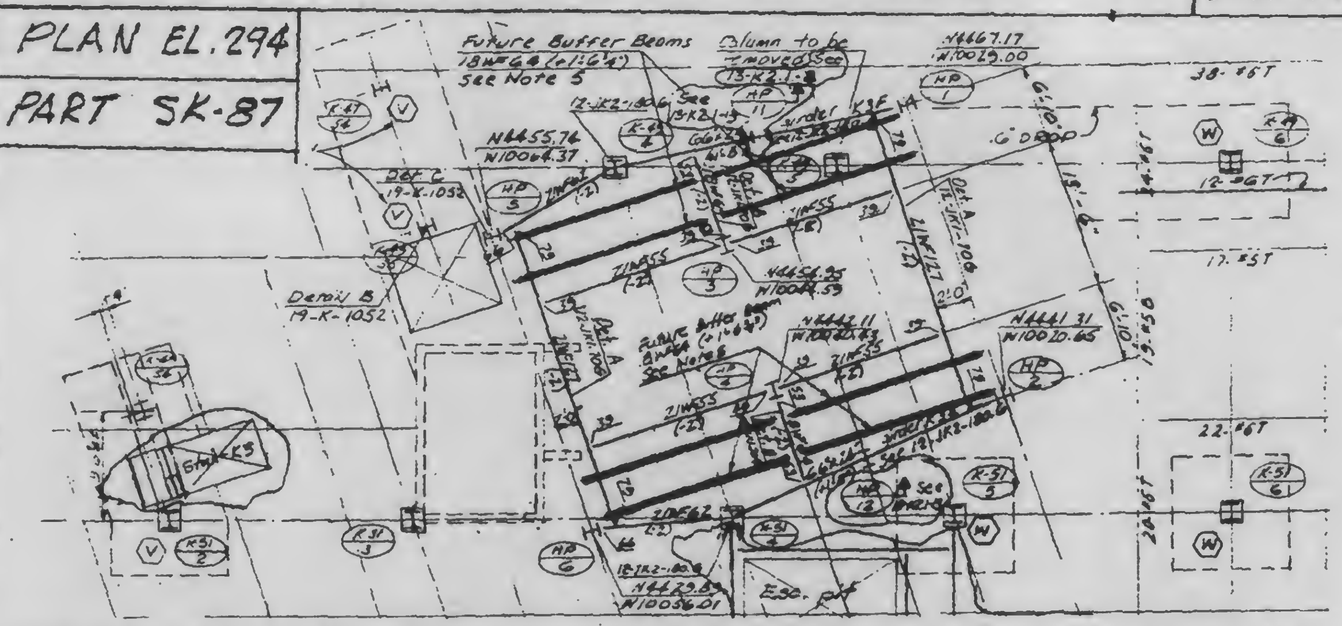

Note: 8 - Future Buffer Beams 18WF64 are now required. Provide W18x65 (±1'-6⅞") length and location in accordance with Approved Elevator shop Dwgs. See 19.20.2 (12.JK1-70G) for details of existing supports

PLAN EL. 284

PART SK-73

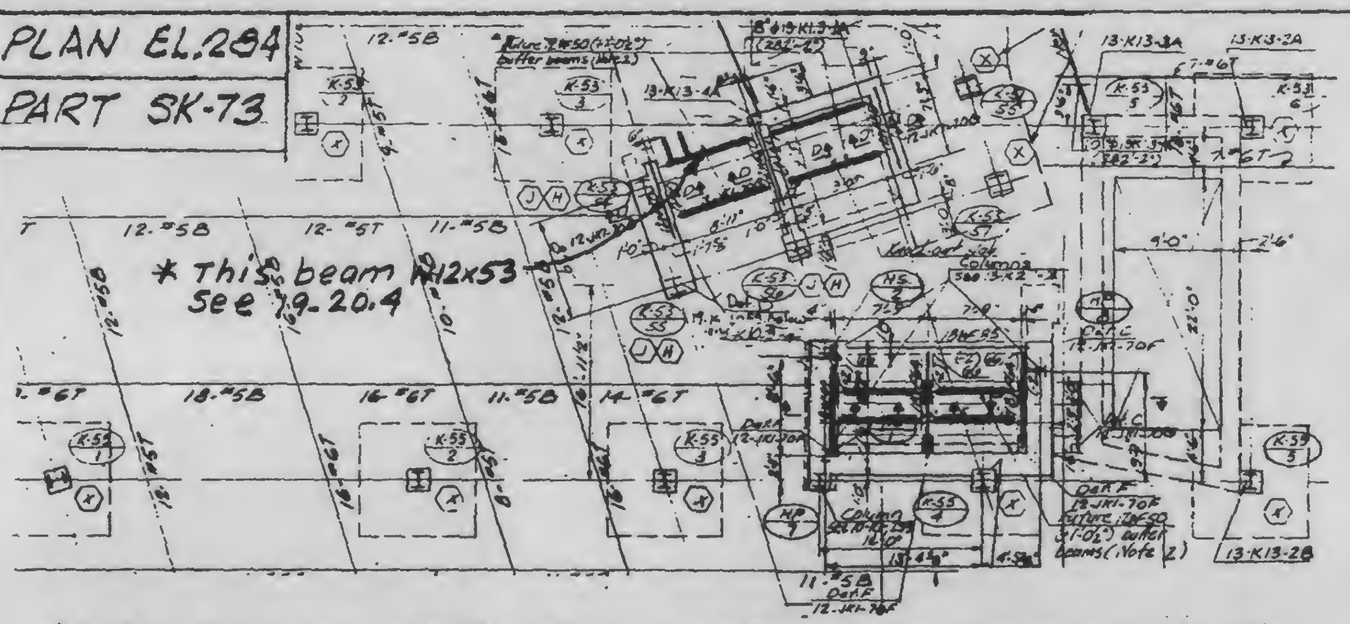

Note: 8-Future Buffer Beams 12WF50 are now required Provide W12x50 (±1'-0⅝") length and location in accordance with Approved Elevator shop Dwgs. Same for 2-Elevator Machine Beam shown on 19.20.4. See 19.20.3 (8.JK8-63.5) for plan of South Elevators and 19.20.2 (12.JK1-70G) for support details. See 19.20.4 (8.JK8-63.10) for plan of North Elevators and 19.20.5 (8.JK8-11) for support details