
SKILLING, HELLE, CHRISTIANSEN, ROBERTSON — Structural & Civil Engineers


PROJECT THE WORLD TRADE CENTER | TITLE SLIDE CONNECTIONS TOWER B | DATE 11-3-72

REVISIONS


Released for construction 11-20-72

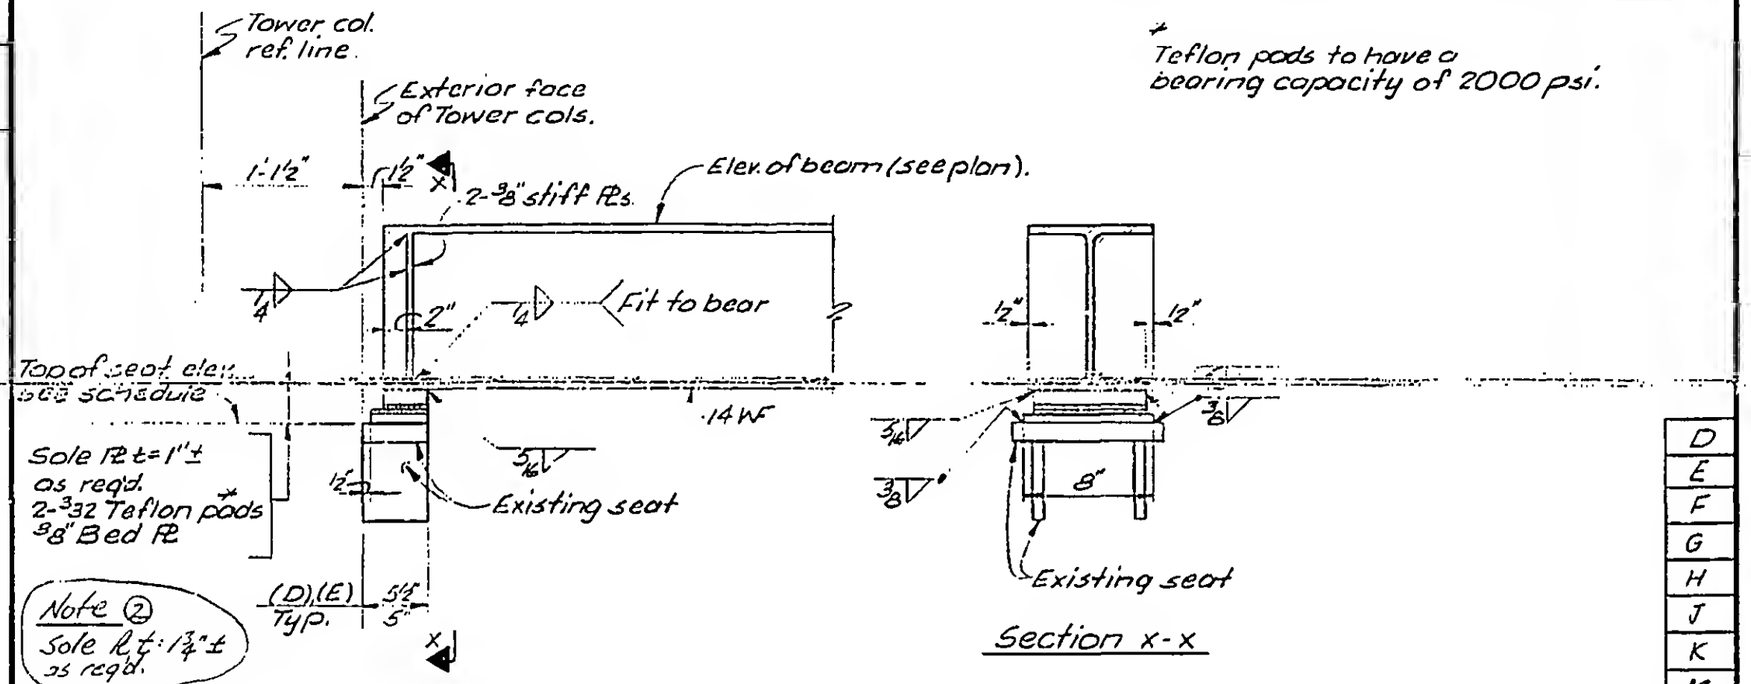

* Teflon pads to have a bearing capacity of 2000 psi.

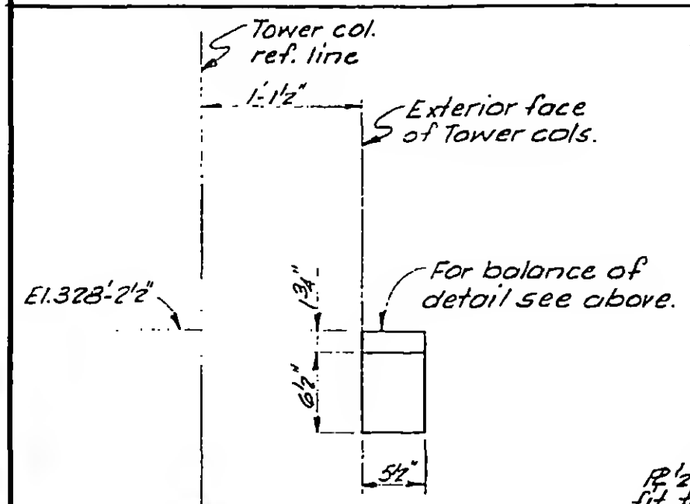

Note ①
Remove exist. seat and replace with new seat.

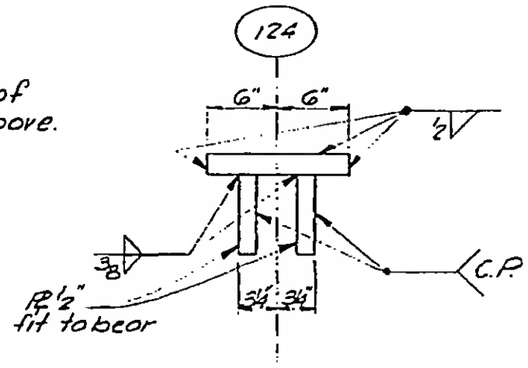

Schedule

Detail Number	Elevation Top of Seat
② D	329'-3⅝"
① E	328'-2½"
F	324'-1"
G	322'-8½"
H	318'-7"
J	317'-2½"
K	313'-1"
M	311'-8½"

D
E
F
G
H
J
K
M

LICENSED PROFESSIONAL ENGINEER LESLIE E. ROBERTSON No 34360 UNIVERSITY OF THE STATE OF NEW YORK

DESIGNED